LUXION by Case-Smart®

DATASHEET
LX-2MP010A-B

LUXION double Schuko socket with aluminium frame

LUXION double Schuko socket with aluminium frame, child protection, 16A and IP45, in a simple, elegant design.





Black



Gold



Grey



White

CODES

Colour	Code
Black	LX-2MP010A-B
Gold	LX-2MP010A-G
Grey	LX-2MP010A-GY
White	LX-2MP010A-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Double Schuko socket with aluminium frame, earthed, with child protection
Number of sockets	2
Operating voltage	100–250 V
Frequency	50/60 Hz
Rated current	16 A
Front material	Aluminium
Base material	Flame-retardant PVC, brass internal contacts
Front dimensions (W × H)	157 × 86 mm
Depth	39 mm (frame 9 mm + mechanism 30 mm)
Mechanism dimensions	Height 47 mm, depth 30 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted

Colours	black, gold, grey, white

DIMENSION DRAWING

Dimensions in mm

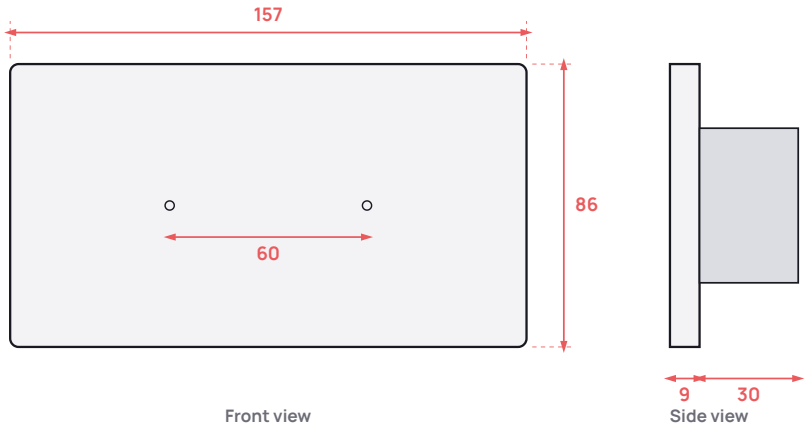

Front view

Side view

DESCRIPTION

LUXION sockets stand out for their simple, elegant and minimalist design. They are versatile in use and feature child protection. Their construction is durable and the products do not discolour over time.

The double Schuko socket with aluminium frame is a practical product, made from quality materials and built to last, offering functionality and convenience in your home.

- Earthed double Schuko socket
- Aluminium frame
- Child protection
- Available in white, gold, grey and black

Simple, elegant and minimalist design

Enjoy the versatility of the new Luxion sockets. LUXION double socket with aluminium frame, for a clean, modern look.

- Double Schuko socket
- Aluminium frame
- LUXION design

Structure / components

- Aluminium frame
- Socket mechanism
- Metal mounting frame
- Screw fixing system: 60 mm

Dimensions

- Width: 157 mm
- Height: 86 mm
- Frame thickness: 9 mm
- Mechanism depth: 30 mm
- Mechanism height: 47 mm

Wiring diagram

Connect each socket mechanism to the three supply conductors, as shown in the wiring diagram.

- Live (L)
- Neutral (N)
- Earth

Installation

- 1. Open the packaging.
- 2. Connect the wires and tighten the screws.
- 3. Fix the frame with the screws.
- 4. Fit the front panel.