LUXION
by Case-Smart®

DATASHEET
LX-2MP024A-B

LUXION double socket with narrow modules and aluminium frame

LUXION double socket with narrow modules and an aluminium frame, minimalist design and child protection.




Black


Gold


Grey


White


CODES

Colour	Code
Black	LX-2MP024A-B
Gold	LX-2MP024A-G
Grey	LX-2MP024A-GY
White	LX-2MP024A-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Double socket with narrow modules (unearthed) and aluminium frame
Number of sockets	2
Operating voltage	100–250 V
Rated current	10 A
Earthing	No; with child protection
Front material	Aluminium
Front dimensions (W × H)	86 × 86 mm
Depth	Frame 9 mm + module 26 mm
Module dimensions	Height 28 mm, depth 26 mm
Fixing screw spacing	60 mm
Certifications	CE, RoHS
Colours	white, black, grey, gold

Dimensions in mm

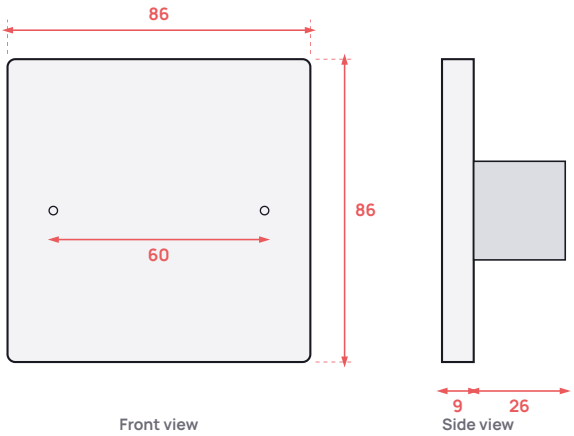

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. They are versatile, feature child protection, and their latest-generation technology helps save energy.

The construction is durable and the sockets do not discolour over time. This is a practical product, made from quality materials and built to last, bringing functionality and comfort to your home.

- Double socket with narrow modules
- Aluminium frame
- Available in white, black, grey and gold

Features

Enjoy the versatility of the new LUXION sockets. This double socket combines narrow socket modules with an aluminium frame in a compact, elegant and minimalist design.

- Double socket with narrow modules
- Aluminium frame
- Child protection
- Durable construction that does not discolour over time

Structure / components

The socket consists of three main parts.

- Aluminium frame
- Socket modules
- Metal mounting frame
- Screw fixing system: 60 mm

Dimensions

- Width: 86 mm
- Height: 86 mm
- Frame thickness: 9 mm
- Module depth: 26 mm
- Module height: 28 mm

Installation / wiring diagram

Connect the neutral and live wires to the terminals of the socket modules, as shown in the wiring diagram.

- Neutral (N)
- Live (L)
- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Use the 2 screws to fix the frame.
- 4. Fit the aluminium frame.