LUXION 1M single mechanical switch mechanism

LUXION 1M single mechanical switch mechanism, 10A 250V~, with a compact, minimalist design, for LUXION glass frames.




Black


Gold


Grey


White


CODES

Colour	Code	EAN
Black	LX-MP014B	0749672493405
Gold	LX-MP014G	0749672493429
Grey	LX-MP014GY	0749672493412
White	LX-MP014W	0749672493399

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Single switch mechanisms
Product type	1M single mechanical switch mechanism, without glass frame
Function	Single mechanical switch, on/off
Number of buttons	1
Operating voltage	Up to 250 V AC
Rated current	10 A
Base material	Plastic
Front dimensions (W × H)	23.5 × 47 mm
Depth	35 mm (15 mm + 20 mm)
Fixing screw spacing	60 mm
Flush-mounted box	Round flush-mounted box
Compatibility	Only with LUXION glass frames (glass and metal frames not included)
Certifications	CE, RoHS
Colours	white, black, gold, grey

Dimensions in mm

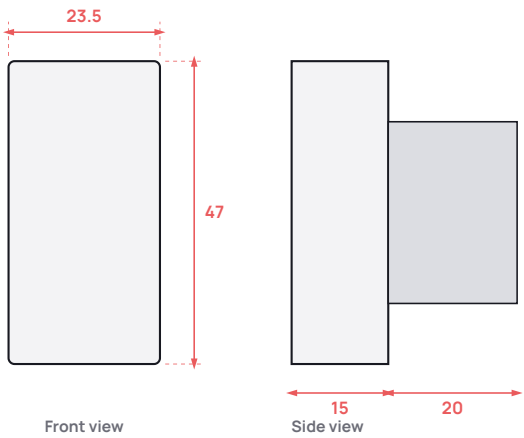

DESCRIPTION

LUXION products stand out for their compact, elegant and minimalist design. They are practical, made from quality materials, durable and bring functionality and comfort to your home.

The 1M single mechanical switch mechanism is a simple solution for lighting control, in a single-module format, for installation in a German-standard (Schuko) flush-mounted box.

Compatible only with LUXION glass frames

Features

Single mechanical switch mechanism in 1M format from the LUXION range.

- Available in white, black, gold and grey
- Rating: 10A 250V~
- Compatible only with LUXION glass frames

Dimensions

The mechanism is fitted to a mounting frame with a screw-fixing system at 60 mm centres.

- Width: 23.5 mm
- Height: 47 mm
- Depth: 15 mm (front) + 20 mm (rear)
- Fixing screw spacing: 60 mm

Not included

- Glass frame
- Metal frame

Installation / wiring diagram

Connect the live (L) to terminal L of the mechanism and run a wire from terminal L1 to the light fitting. The neutral (N) is connected directly to the light fitting.

- Live (L): to terminal L
- Terminal L1: to the light fitting
- Neutral (N): directly to the light fitting
- Mechanism rating: 10A 250V~