# LUXION key fob remote control

RF433 key fob remote control with 4 buttons for Luxion RF switches: control of 3 lights and an all-off button.



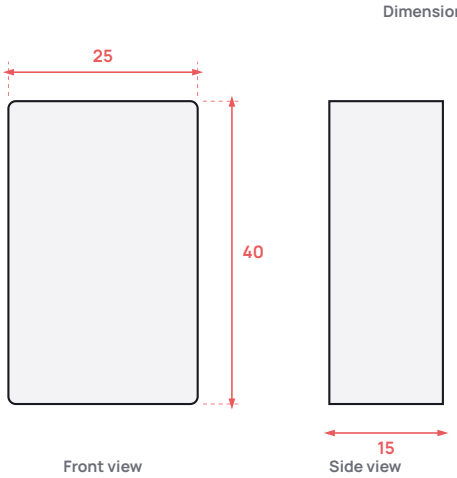

## CODES

| Colour | Code |
|---|---|
| – | LX-BG-RC2014 |

## SPECIFICATIONS

| | |
|---|---|
| Brand | LUXION |
| Category | Smart home › Remote controls |
| Connectivity | RF433 |
| Product type | Key fob remote control |
| Function | Control of 3 lights (one button per light) and an all-off button |
| Number of buttons | 4 |
| Power supply | 27A / 12 V battery, 28 × 8 mm (not included) |
| Protocol | RF433 |
| RF frequency | 433.92 MHz |
| Range | Up to 20 m |
| Compatibility | Only with Luxion RF433 switches (Luxion RF and Luxion RF Wi-Fi) |
| LED indication | Indicator light |
| Base material | Plastic |
| Front dimensions (W × H) | 25 × 40 mm |
| Depth | 15 mm |

## DIMENSION DRAWING




## DESCRIPTION

The Luxion key fob remote control is compatible with Luxion RF433 switches with wireless operation. It lets you control 3 lights, while one button is for switching everything off (all-OFF).

It has 4 buttons: one button for each light and an all-off button that switches off all 3 lights together.

It works only in combination with Luxion RF and Luxion RF Wi-Fi switches.

### LUXION key fob remote control

Compact key fob remote control for operating LUXION switches. Note: the remote control works only with LUXION switches.

### Switch on / off function

- A: single switch
- B: double switch
- C: triple switch
- D: switch off all switches
- Indicator light
- Key ring attachment

### Remote dimmer function

- A: switch
- B: increase light intensity
- C: decrease light intensity
- D: switch off the switch
- Indicator light
- Key ring attachment

### Dimensions and battery

The battery is not included.

- Length: 40 mm
- Width: 25 mm
- Thickness: 15 mm
- Battery: 27A / 12V (not included)
- Battery dimensions: 28 mm x 8 mm

### Pairing instructions

- 1. Hold your finger on the switch for 5 seconds until you hear a sound.
- 2. Press the button (A, B, C) until you hear a sound again. The remote control has been paired successfully.

### Unpairing

Hold your finger on the switch for 10 seconds until you hear a sound twice.