LUXION
by Case-Smart®

DATASHEET
LX-MP011UCG-B

LUXION 20W fast-charge USB-C + USB-C socket with glass frame

LUXION socket with two 20W fast-charge USB-C ports and an elegant glass frame, for homes, offices and commercial premises.




Black


Gold


Grey


White


CODES

Colour	Code
Black	LX-MP011UCG-B
Gold	LX-MP011UCG-G
Grey	LX-MP011UCG-GY
White	LX-MP011UCG-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	USB-C + USB-C fast-charge socket with glass frame
Function	20 W fast charge
Number of outlets	2 × USB-C
Operating voltage	Input: 100–240 V AC
Frequency	50/60 Hz
Rated current	Input: 1.5 A max.
Output	DC USB-C: 5/9/12/15 V 3 A, 20 V 3.25 A max.
Front material	Glass
Front dimensions (W × H)	86 × 86 mm
Fixing screw spacing	85 mm
Protection rating	IP20
Certifications	CE, RoHS

DIMENSION DRAWING

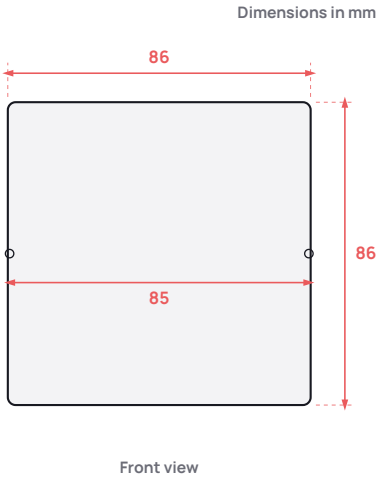

DESCRIPTION

The 20W fast-charge socket with USB-C + USB-C ports and glass frame is the ideal solution for your home or premises. Enjoy a refined and functional design, with attention to detail.

The LUXION range blends seamlessly into any environment, so it can be installed not only at home but also in spaces such as:

- offices and shops
- HoReCa venues (hotels, restaurants, cafés)
- showrooms and presentation rooms
- warehouses and modern industrial spaces
- residential or office buildings

Features

Charging socket with two USB-C ports and a glass frame, with a refined and functional design.

- 20W fast charge
- Two USB-C ports
- Glass frame
- Input 100~240V AC, 50/60Hz
- CE, RoHS certifications

Ideal for

Blends seamlessly into any environment, residential or commercial.

- Homes and residential buildings
- Offices and shops
- HoReCa venues
- Showrooms and presentation rooms
- Warehouses and modern industrial spaces

Structure / components

The product consists of the USB-C + USB-C mechanism and the single glass frame.

- USB-C + USB-C socket mechanism (LX-MP011UC)
- Single glass frame (LX-M1-1F)

Dimensions

Standard dimensions for installation in a flush-mounted box.

- Dimensions: 86 x 86 mm
- Fixing screw spacing: 85 mm