LUXION double mechanical push-button (momentary) switch mechanism

LUXION double mechanical push-button switch mechanism, 250V AC 10A, up to 100,000 operations, for LUXION glass frames only.




Black


Gold


Grey


White

CODES

Colour	Code	EAN
Black	LX-MP032B	0658606019607
Gold	LX-MP032G	0658606019584
Grey	LX-MP032GY	0658606019591
White	LX-MP032W	0658606019577


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Double switch mechanisms
Product type	Double mechanical push-button (momentary) switch mechanism, without glass frame
Operation	Mechanical, push-button (momentary)
Number of buttons	2
Operating voltage	250 V AC (maximum)
Rated current	10 A
Neutral (N)	Live (L) and neutral (N) connection as per the diagram
Base material	Flame-retardant PVC plastic
Front dimensions (W × H)	50 × 50 mm (mechanism)
Depth	35 mm (15 mm + 20 mm)
Mechanism dimensions	Rear body height 49 mm
Fixing screw spacing	60 mm

	included
Compatibility	LUXION glass frames only
Durability	Up to 100,000 operations
Colours	black, gold, grey, white

DIMENSION DRAWING

Dimensions in mm

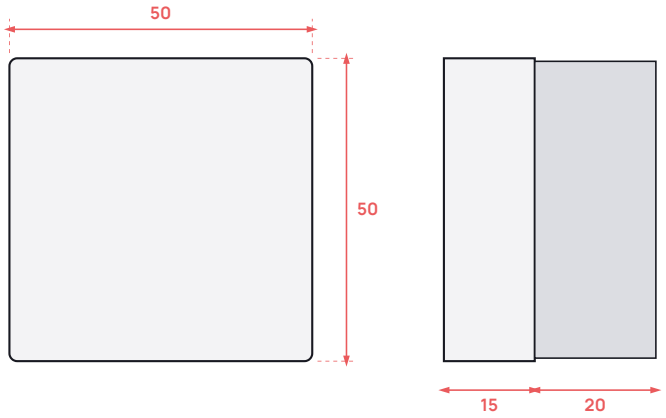

DESCRIPTION

The LUXION double mechanical push-button (momentary) switch mechanism has a compact, elegant and minimalist design. Its construction is durable and does not discolour over time. It is a practical product, made from quality materials with a long service life.

The two independent buttons work as push-buttons: after being pressed, they automatically return to their original position.

Compatible only with LUXION glass frames

Features

Double mechanical push-button switch mechanism from the LUXION range, with buttons that return after being pressed.

- 2 independent buttons
- Push-button (momentary) operation
- Rated for up to 100,000 operations
- Available in white, black, gold and grey

Dimensions

The mechanism is fixed with screws. The glass frame and metal frame are not included.

- Front: 50 x 50 mm
- Height of mechanism rear body: 49 mm
- Fixing screw spacing: 60 mm
- Glass frame: not included
- Metal frame: not included

Installation / wiring diagram

In the wiring diagram the live (L) is connected to the mechanism and each button controls a separate light fitting, while both light fittings are connected to the neutral (N).

- Neutral (N)
- Live (L)
- Each button controls its own light fitting