LUXION double mechanical switch mechanism

LUXION double mechanical switch mechanism, 250V AC 10A, compact and elegant, compatible only with LUXION glass frames.




Black


Gold


Grey


White

CODES

Colour	Code	EAN
Black	LX-MP004B	0749672493160
Gold	LX-MP004G	0749672493184
Grey	LX-MP004GY	0749672493177
White	LX-MP004W	0749672493153


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Double switch mechanisms
Product type	Double mechanical switch mechanism, without glass frame
Function	Mechanical switch, 2 independent circuits
Number of rockers	2
Operating voltage	up to 250 V AC
Rated current	10 A
Compatibility	LUXION glass frames only
Base material	Flame-retardant PVC plastic
Front dimensions (W × H)	50 × 50 mm
Depth	34 mm
Mechanism dimensions	50 × 50 × 34 mm, rear body height 49 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted, screw fixing
Mechanical endurance	up to 100.000 operations

Package contents	Switch mechanism (glass and metal frames not included)
Colours	black, gold, grey, white

DIMENSION DRAWING

Dimensions in mm

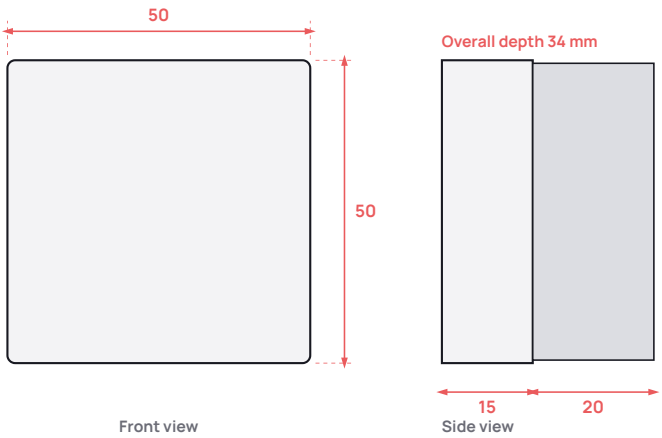

DESCRIPTION

The LUXION double mechanical switch mechanism stands out for its compact, elegant and minimalist design. Its construction is durable and the products do not discolour over time. It is a practical product, made from quality, long-lasting materials.

Compatible only with LUXION glass frames.

Features

Double mechanical switch mechanism from the LUXION range, available in white, black, gold and grey finishes.

- Two independent switch rockers
- Each rocker controls a separate lighting circuit
- Non-combustible PVC plastic
- Rated for up to 100,000 operations

Structure / components

The mechanism is supplied without a frame and fits exclusively into LUXION glass frames.

- Glass frame not included
- Metal frame not included

Dimensions

The mechanism is fixed with a screw system.

- Mechanism front: 50 x 50 mm
- Height of mechanism rear body: 49 mm
- Fixing screw spacing: 60 mm
- Rating marking on the mechanism: 10A 250V~

Installation / wiring diagram

The live (L) is connected to the mechanism and each rocker controls a separate light fitting, while the neutral (N) runs directly to both light fittings.

- Neutral (N): connected directly to the light fittings
- Live (L): connected to the switch mechanism
- Each rocker switches one lighting circuit