LUXION by Case-Smart®


DATASHEET
LX-2MP010G-B

LUXION double socket with glass frame


LUXION double Schuko socket with glass frame, child protection and an elegant, minimalist design.




Black


Gold


Grey


White

CODES

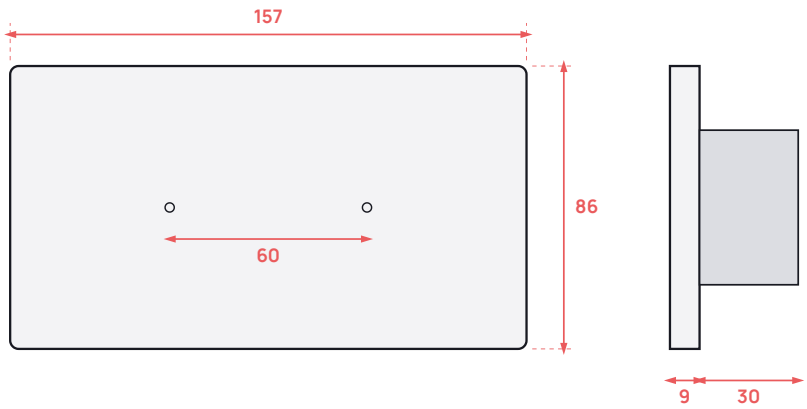
Colour	Code	EAN
Black	LX-2MP010G-B	0658606019812
Gold	LX-2MP010G-G	0658606019836
Grey	LX-2MP010G-GY	0658606019829
White	LX-2MP010G-W	0658606019805

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Double Schuko socket with glass frame, with earthing and child protection
Number of sockets	2
Operating voltage	100–250 V
Frequency	50/60 Hz
Rated current	16 A
Front material	Glass
Base material	Flame-retardant PVC, brass internal contacts
Front dimensions (W × H)	157 × 86 mm
Depth	39 mm (frame 9 mm + mechanism 30 mm)
Mechanism dimensions	Height 47 mm, depth 30 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted
Protection rating	IP20

DIMENSION DRAWING

Dimensions in mm



DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. They are versatile in use and feature child protection.

Their construction is durable and the products do not discolour over time. This is a practical product, made from quality materials and built to last, offering functionality and comfort in your home.

- Double Schuko socket with glass frame
- Earthing and child protection
- Durable construction that does not discolour

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion sockets. The double socket comes with a glass frame for a clean, modern look.

Structure / components

- Glass frame
- Socket mechanism
- Metal frame
- Screw fixing system: 60 mm

Dimensions

- Width: 157 mm
- Height: 86 mm
- Frame thickness: 9 mm
- Mechanism depth: 30 mm
- Mechanism height: 47 mm

Wiring diagram

The socket is connected to the live, neutral and earth.

- Live (L)
- Neutral (N)
- Earth

Installation steps

- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Fix the frame with the screws.
- 4. Fit the front panel.