


LUXION double Schuko socket mechanism for a single flush-mounted box


LUXION double Schuko socket mechanism for a single flush-mounted box, 16A 250V, with child protection and brass contacts.




Black


Gold


Grey


White

CODES


Colour	Code	EAN
Black	LX-MP210B	0749672496185
Gold	LX-MP210G	0749672496192
Grey	LX-MP210GY	0749672496208
White	LX-MP210W	0749672496178

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Sockets and USB
Product type	Double Schuko socket mechanism for a single flush-mounted box
Number of sockets	2
Operating voltage	250 V~
Rated current	16 A
Neutral (N)	Live (L), neutral (N), earth
Child protection	Yes
Base material	Non-flammable PVC, brass contacts
Front dimensions (W × H)	86 × 86 mm
Depth	50 mm (21 mm + 9 mm + 20 mm)
Mechanism dimensions	Height 50 mm
Fixing screw spacing	60 mm
Flush-mounted box	Single flush-mounted box
Mounting	Flush-mounted, on metal frame,

Colours	black, gold, grey, white

DIMENSION DRAWING

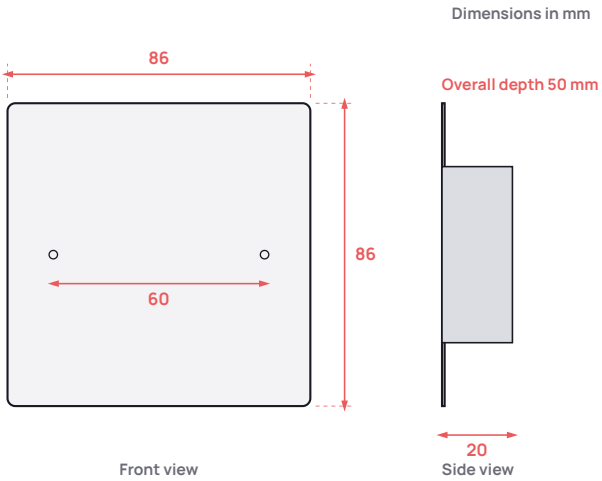

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. The double Schuko socket mechanism fits into a single flush-mounted box and offers two sockets in the space of one.

- Child protection for greater safety at home.
- Latest-generation technology that helps save energy.
- Durable construction that does not discolour over time.
- Versatile use in every room of the home.

This is a practical product, made from quality materials and built to last, offering functionality and comfort in your home.

Features

Double Schuko socket in a single flush-mounted box, with a modern, minimalist design.

- Two earthed Schuko sockets
- Child protection
- Fire-resistant PVC with internal brass contacts
- Does not discolour over time

Structure / components

- Glass frame
- Socket mechanism
- Metal frame
- Screw fixing system: 60 mm

Dimensions

- Width: 86 mm
- Height: 86 mm
- Depth: 21 mm + 9 mm + 20 mm
- Mechanism height: 50 mm

Installation / wiring diagram

Connection is made with neutral (N), live (L) and earth, for 16A 250V~.

- Disassemble the mechanism.
- Fix the mechanism to the metal frame and connect the wires according to the diagram.
- Place the mechanism in the flush-mounted box.
- Fit the glass frame and then secure the mechanism with the screws.