LUXION LX-BG-WP1 Wi-Fi PIR motion sensor

Compact Wi-Fi PIR motion sensor with a 5 m range and 120° angle, compatible with Alexa, Google Assistant and IFTTT.




CODES

Colour	Code
–	LX-BG-WP1

SPECIFICATIONS

Brand	LUXION
Category	Smart home › Smart sensors
Connectivity	Wi-Fi
Product type	Wi-Fi PIR motion sensor
Function	Motion detection, history, notifications, smart scenes; RESET button, OFF / ON switch
Power supply	3 AAA batteries (not included)
Protocol	Wi-Fi 2.4 GHz, IEEE 802.11 b/g/n
Range	Detection up to 5 m, 120° angle (on wall or ceiling)
Compatibility	Smart Life app; Amazon Alexa, Google Assistant, IFTTT
Front material	ABS
Front dimensions (W × H)	65 × 65 mm
Depth	25 mm
Mounting	On wall or ceiling
Operating temperature	-20°C ~ 60°C
Operating humidity	10% ~ 90%

DIMENSION DRAWING

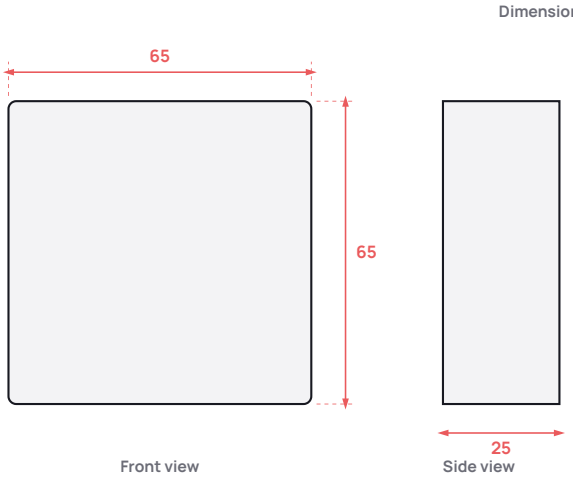

DESCRIPTION

The LUXION PIR motion sensor is small in size, so it can be fitted both in tight spots and in open spaces, and it can monitor hallways, garages, rooms and more.

It offers a 5-metre detection range and a 120° detection angle. It connects to your home via Wi-Fi, so you can monitor and control it from your smartphone through the Smart Life app.

It works with Amazon Alexa, Google Assistant and IFTTT.

Features

The LUXION PIR motion sensor detects movement and connects to your home network via Wi-Fi, allowing monitoring and control from the app on your smartphone.

- Motion detection
- App control
- Wi-Fi connection
- 120° detection angle
- Activity history
- Notifications

Motion detection

The sensor is mounted on the wall or ceiling and covers a 120° detection angle in either position.

- Wall mounting: 120°
- Ceiling mounting: 120°
- Detection distance: 5 m

Creating smart scenes

Combined with other Luxion smart devices, you can create smart scenes: for example, when the sensor is triggered, the light in a room switches on, or all the lights in a room switch off.

Dimensions and power supply

- Height: 65 mm
- Width: 65 mm
- Thickness: 25 mm
- Power supply: AAA batteries (NOT included)
- RESET button and OFF / ON switch