LUXION by Case-Smart®

DATASHEET
LX-MT-A202M-B

LUXION double two-way / intermediate marble touch switch, Series A

LUXION Series A double two-way / intermediate touch switch made of natural marble, compatible only with LUXION mechanisms.





Black



Grey



White

CODES


Colour	Code
Black	LX-MT-A202M-B
Grey	LX-MT-A202M-GY
White	LX-MT-A202M-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Two-way / intermediate touch switches
Product type	Double two-way / intermediate touch switch with marble front, Series A
Function	Two-way / intermediate; silent touch
Number of buttons	2
Operating voltage	90–250 V AC
Frequency	50/60 Hz
Maximum load	300 W per channel, 500 W per channel for resistive load
Standby consumption	0.02 W
Neutral wire (N)	Not required (fits the standard installation)
Compatibility	LUXION mechanisms only
LED indicator	Blue with the light on, faint blue with the light off
Front material	Natural marble
Base material	Flame-retardant PVC plastic; metal frame (included)

Depth	35 mm
Mounting	Flush-mounted, with screws
Protection rating	IP20
Operating temperature	-20 ~ +70 °C
Operating humidity	≤ 95%
Colours	black, grey, white

DIMENSION DRAWING

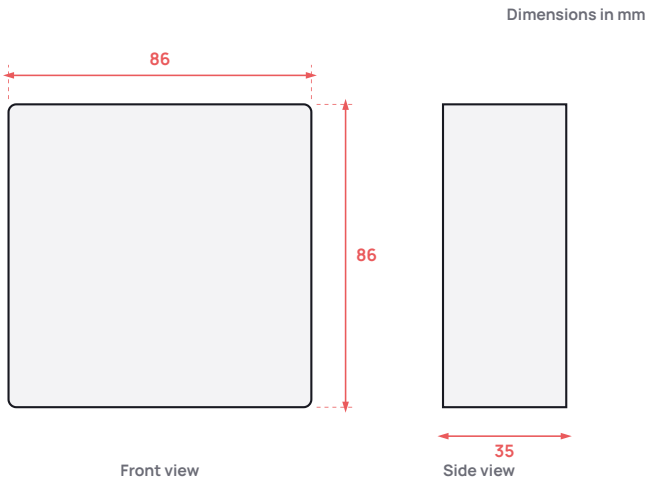

DESCRIPTION

The LUXION double two-way / intermediate marble touch switch from Series A is compatible only with LUXION mechanisms. It stands out for its premium, elegant and minimalist design.

Made of natural marble, this model offers extra refinement and exclusivity. It is ideal for modern interiors, luxury homes, hotels or premium offices.

It is made of quality materials, durable and practical. It offers functionality and comfort and perfectly complements a refined décor.

The metal frame is also included in the package.

Features

Double touch switch with two-way / intermediate function and a premium natural marble front.

- Premium natural marble front
- Fits the standard electrical installation, no neutral wire
- Blue LED indicator when the light is on and faint blue when it is off
- Makes no sound when touched
- Compatible only with LUXION mechanisms
- Ideal for modern spaces, luxury homes, hotels and premium offices

Technical parameters

- Operating voltage: 90V ~ 250V AC (maximum 250V AC)
- Frequency: 50/60Hz
- Load: 300W/channel, 500W/channel for resistive load
- Standby consumption: 0.02W
- Operating temperature: -20°C ~ +70°C
- Operating humidity: ≤95%
- Protection rating: IP20

LX-GPM-002 and LX-MT-A202.

- Marble panel
- Base made of non-flammable PVC plastic
- Metal frame (included)

Dimensions

- 86 x 86 x 35 mm

the two-way terminal and powered at ~220V. Caution! Switch off the power supply during installation or removal!

- ~220V supply: L (live), N (neutral)
- Terminals: two-way, L4, L3, L2, L1, L
- Two mechanisms: control from two points