

LUXION double two-way / intermediate switch with socket and glass frame


LUXION double two-way / intermediate switch with socket in a glass frame, for up to 3 switches on the same circuit.




Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-MT-S202/MP010-B
Gold	LX-MT-S202/MP010-G
Grey	LX-MT-S202/MP010-GY
White	LX-MT-S202/MP010-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Switch and socket
Product type	Double two-way / intermediate switch + Schuko socket with glass frame
Function	Two-way / intermediate (up to 3 switches on the circuit)
Number of buttons	2
Number of sockets	1
Operating voltage	110–250 V
Frequency	50/60 Hz
Rated current	16 A socket / 10 A switch
Front material	Glass
Base material	Metal mounting frame
Front dimensions (W × H)	157 × 86 mm
Depth	35 mm (panel 9 mm + mechanism 26 mm)
Mechanism dimensions	Height 49 mm, depth 26 mm

Fixing screw spacing	60 mm (130 mm between the holes of the two positions)
Mounting	Flush-mounted, with screws
Operating temperature	-20 ~ +70 °C
Operating humidity	10% ~ 93%
Service life	Up to 100,000 operations
Colours	black, gold, grey, white

DIMENSION DRAWING

Dimensions in mm

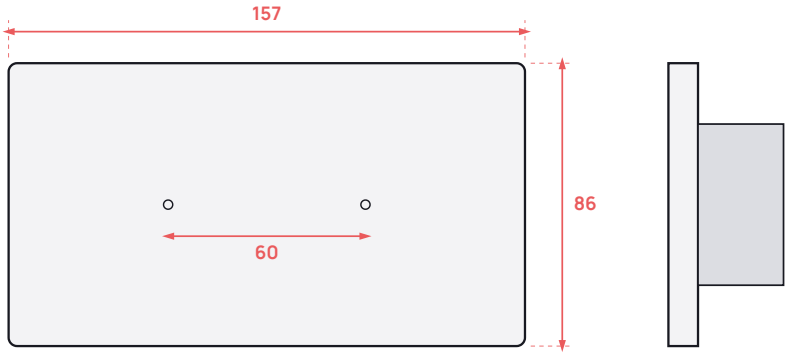

DESCRIPTION

The LUXION double two-way / intermediate switch with socket and glass frame combines a compact, elegant and minimalist design. Its construction is durable and the product does not discolour over time, so its elegant appearance remains unchanged.

It is a practical product, made from quality, durable materials, offering functionality and comfort in your home.

Up to 3 switches (intermediate) can be connected on the same circuit.

Features

Enjoy the flexibility of the new Luxion switches: a double switch and a socket in one LUXION glass frame, with a compact, elegant and minimalist design.

- Extremely precise touch sensor, the same as a smartphone sensor
- Does not discolour: the elegant design remains unchanged
- Two-way / intermediate operation, up to 3 switches on the same circuit
- Service life of up to 100,000 operations

Structure / components

- Glass panel
- Switch + socket mechanism
- Metal frame

Dimensions

Screw fixing system.

- Fixing hole spacing: 130 mm
- Mechanism fixing spacing: 60 mm
- Length: 157 mm
- Height: 86 mm
- Panel thickness: 9 mm
- Mechanism depth: 26 mm
- Mechanism height: 49 mm

connection.

- Neutral (N)
- Earth
- Live (L)
- Terminals L1, L2, L3, L(A)
- Two-way switch (2Way Switch)
- Two-way - intermediate connection

- 2. Connect the wires and tighten the screws.
- 3. Use the screws to fix the frame.
- 4. Fit the front panel.