LUXION by Case-Smart

DATASHEET
LX-MT-A202G-B

LUXION double two-way / intermediate touch switch with glass frame, Series A

LUXION Series A double two-way / intermediate touch switch, with 4 mm safety glass and a precise touch sensor, no synchronisation required.




Black


Gold


Grey


White

CODES


Colour	Code	EAN
Black	LX-MT-A202G-B	9578152208564
Gold	LX-MT-A202G-G	9158240325917
Grey	LX-MT-A202G-GY	9544870978768
White	LX-MT-A202G-W	9603980670082

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Two-way / intermediate touch switches
Product type	Double two-way / intermediate touch switch with glass frame, Series A
Function	Two-way / intermediate, touch; no synchronisation required
Number of buttons	2
Operating voltage	90–250 V AC
Frequency	50/60 Hz
Maximum load	600 W per channel (resistive)
Standby consumption	0.02 W
Neutral (N)	Required (according to the wiring diagram)
Terminals	L, L1, L2, L3, L4, two-way
LED indicator	Blue when the light is on, faint blue when it is off; no touch sound
Front material	Safety glass (crystal), heat-resistant
Glass thickness	4 mm

Front dimensions (W × H)	86 × 86 mm
Depth	35 mm overall
Mounting	Flush-mounted, screw fixing
Protection rating	IP20
Operating temperature	-20 °C ~ +70 °C
Operating humidity	10% – 93%
Colours	white, black, grey, gold

DIMENSION DRAWING

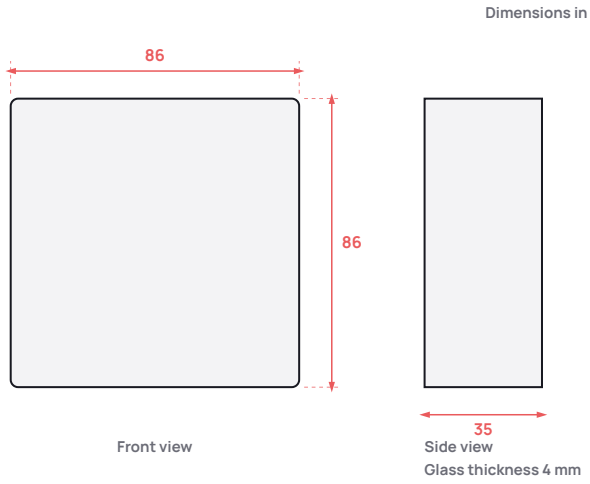

DESCRIPTION

LUXION switches stand out for their compact, elegant and minimalist design. They are versatile in use and their touch sensor is extremely precise, the same as that of a smartphone. They are durably built and the switches do not discolour over time.

The Series A double two-way / intermediate touch switch features a 4 mm thick safety glass front and controls two independent lighting circuits from multiple points. It is a practical product, made from quality materials and built to last, offering functionality and comfort in your home.

- Blue LED indicator when the light is on and faint blue when it is off, for easy location in the dark
- Silent operation: no sound when touched
- Durable glass that keeps its elegant appearance

No synchronisation required

Touch sensor

The touch sensor is extremely precise, the same as the sensor of a smartphone.

Does not discolour

The elegant design remains unchanged over time.

ON / OFF function

Switch the lighting on and off with a simple touch, with a blue LED indicator (bright when the light is on, faint when it is off).

- ON
- OFF

- Load: 600W per channel – resistive
- Frequency: 50/60Hz
- Self-consumption: 0.02W
- Operating temperature: -20°C ~ +70°C
- Protection rating: IP20

Construction and dimensions

Front made of 4 mm thick heat-resistant safety glass, with a base of flame-retardant PVC plastic.

- Dimensions: 86 x 86 x 35 mm
- Composition: LX-MT-A202 + LX-GP003

the two-way terminal, with a ~220V supply (live L and neutral N).

- Neutral (N) and live (L), ~220V
- Terminals: two-way, L4, L3, L2, L1, L

Installation

Caution! Switch off the power supply during installation or removal.

- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Use the 2 screws to secure the frame.
- 4. Fit the front panel.