LUXION by Case-Smart®

DATASHEET
LX-MP022G-B

LUXION HDMI socket with glass frame

LUXION HDMI socket with glass frame, female-to-female connector and an elegant, minimalist front that does not discolour.




Black


Gold


Grey


White


CODES

Colour	Code
Black	LX-MP022G-B
Gold	LX-MP022G-G
Grey	LX-MP022G-GY
White	LX-MP022G-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › TV, network and USB sockets
Product type	HDMI socket with glass frame (HDMI mechanism + blank cover)
Connector	HDMI, female-to-female
Front material	Glass
Glass thickness	4 mm
Base material	Plastic base, metal mounting frame
Front dimensions (W × H)	86 × 86 mm
Depth	24 mm (9 mm + 15 mm)
Fixing screw distance	60 mm
Mounting	Flush-mounted, screw fixing
Certifications	CE, RoHS
Colours	white, black, gold, grey

DIMENSION DRAWING

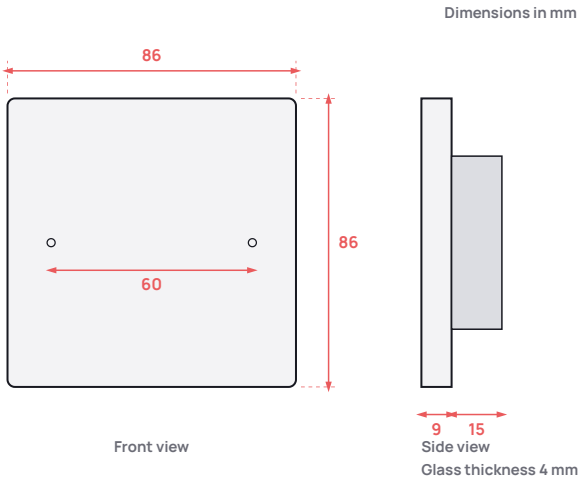

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. They are versatile and feature child protection, while the latest-generation technology helps save energy.

The construction is durable and the sockets do not discolour over time. This is a practical product, made from quality materials and built to last, offering functionality and comfort in your home.

- HDMI socket with female-to-female connector
- Glass frame that keeps its elegant appearance
- Screw fixing

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion products. The LUXION HDMI socket with glass frame gives your walls a compact, elegant and minimalist look.

Does not discolour

The elegant design remains unchanged over time.

Structure / components

The socket consists of the following parts:

- Glass frame
- HDMI socket mechanism + blank cover
- Plastic base
- Metal frame

Dimensions

Screw fixing system.

- Fixing distance: 60 mm
- Width: 86 mm
- Height: 86 mm
- Depth: 9 mm + 15 mm
- Thickness: 4 mm

Installation / wiring diagram

Follow the steps below for installation:

- 1. Fix the multimedia sockets to the plastic base.
- 2. Fit the sockets at the top.
- 3. Secure the sockets at the bottom.
- 4. Fit the sockets into the metal frame.
- 5. Fit the sockets at the top.
- 6. Secure the sockets at the bottom.
- 7. Use the 2 screws to fix the frame.
- 8. Fit the front panel.