LUXION marble single two-way / intermediate touch switch, Series A

Single two-way / intermediate touch switch in natural marble, in white, grey or black, compatible only with LUXION mechanisms.





Black



Grey



White

CODES

Colour	Code
Black	LX-MT-A102M-B
Grey	LX-MT-A102M-GY
White	LX-MT-A102M-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Two-way / intermediate touch switches
Product type	Single two-way / intermediate touch switch with marble panel, Series A (with metal frame)
Function	Two-way / intermediate, touch, silent
Number of gangs	1
Operating voltage	90–250 V AC
Frequency	50–60 Hz
Maximum load	300 W / channel; 500 W / channel for resistive load
Standby consumption	0.02 W
Neutral (N)	Not required – fits conventional installations
LED indicator	Blue with the light on, faint blue with the light off
Front material	Natural marble
Base material	Flame-retardant PVC plastic, metal frame (included)
Front dimensions (W ×	86 × 86 mm

Depth	35 mm
Mounting	Flush-mounted; terminals L4, L3, L2, L1, L
Protection rating	IP20
Operating temperature	-20 ~ +70 °C
Operating humidity	≤95%
Certifications	UKCA, CE, RoHS
Compatibility	LUXION mechanisms only
Colours	black, grey, white

DIMENSION DRAWING

Dimensions in mm

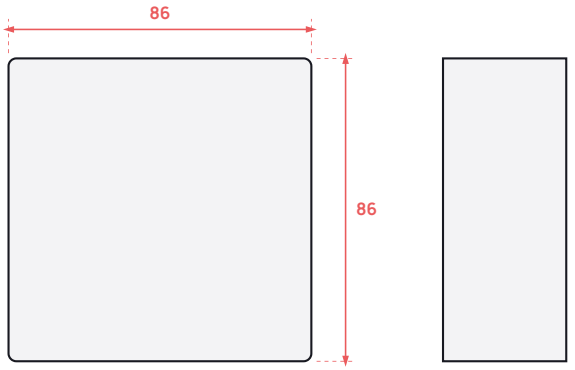

DESCRIPTION

The LUXION marble single two-way / intermediate touch switch from Series A is compatible only with LUXION mechanisms. It stands out for its premium, elegant and minimalist design.

Made from natural marble, this model adds refinement and exclusivity, which makes it ideal for:

- modern interiors
- luxury homes
- hotels
- premium offices

Made from quality materials, durable and practical, it offers functionality and convenience, ideally complementing refined décor.

It fits into a conventional electrical installation and does not require a neutral wire. The LED indicator lights blue when the light is on and faint blue when it is off, and the switch makes no sound when touched.

A metal frame is also included in the package.

controlling the same light fitting from two or more points.

- Premium marble panel
- Two-way / intermediate function
- LED indicator: blue with the light on, faint blue with the light off
- Silent operation, no sound when touched
- No neutral wire required, for conventional installations
- Compatible only with LUXION mechanisms

Technical parameters

Data marked on the two-way switch mechanism.

- Power supply: 90V ~ 250V
- Frequency: 50/60Hz
- Standby consumption: 0.02W
- Operating temperature: -20°C ~ +70°C
- Terminals: L4, L3, L2, L1, L
- Markings: UKCA, CE, RoHS

mechanism, and comes with a metal frame.

- Set codes: LX-GPM-001, LX-MT-A102
- Base made of fire-resistant PVC plastic
- Metal frame included in the package

Dimensions

Overall dimensions 86 x 86 x 35 mm.

Installation / wiring diagram

The wiring diagrams show two and three two-way mechanisms controlling one light fitting on a ~220V supply.

- Two-way: two mechanisms control one light fitting
- Multiple points: three mechanisms control one light fitting
- The mechanisms are connected to each other via terminal L4
- The live (L) connects to terminal L and the light fitting to terminal L1
- The neutral (N) connects directly to the light fitting
- Caution! Disconnect the power supply when installing or removing the switch.