LUXION mechanical triple two-way switch mechanism

LUXION mechanical triple two-way switch mechanism, 250V AC / 10A, compatible only with LUXION glass frames.




Black


Gold


Grey


White

CODES


Colour	Code	EAN
Black	LX-MP007B	0749672493283
Gold	LX-MP007G	0749672493306
Grey	LX-MP007GY	0749672493290
White	LX-MP007W	0749672493276

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Two-way / intermediate mechanisms
Product type	Mechanical triple two-way switch mechanism, without glass frame
Operation	Mechanical, two-way
Number of rockers	3
Operating voltage	250 V AC (maximum)
Rated current	10 A
Compatibility	Only with LUXION glass frames; works together with LUXION mechanical double two-way switches
Base material	Flame-retardant PVC plastic
Front dimensions (W × H)	50 × 50 mm (mechanism)
Depth	34 mm (15 mm + 20 mm)
Mechanism dimensions	50 × 50 × 34 mm, body height 49 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted; glass and metal frames not included

Colours	white, black, grey, gold

DIMENSION DRAWING

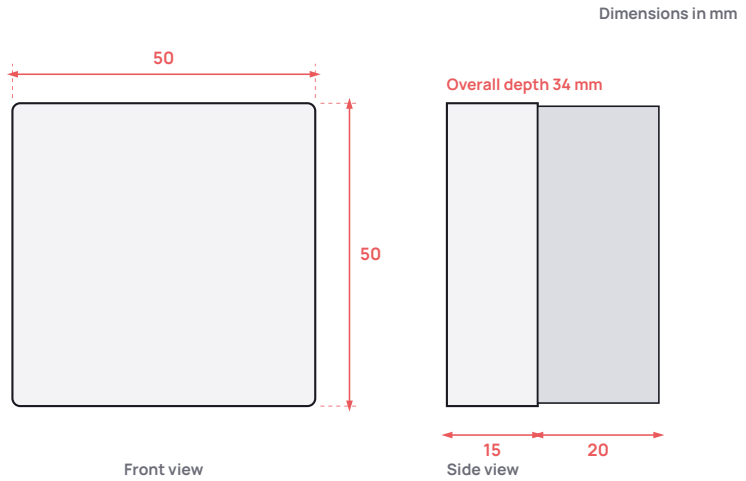

DESCRIPTION

The LUXION mechanical triple two-way switch mechanism stands out for its compact, elegant and minimalist design. It is robustly built and does not discolour over time. It is a practical product, made from high-quality, long-lasting materials.

It works in combination with the LUXION mechanical double two-way switches.

Compatible only with LUXION glass frames.

Features

LUXION mechanical triple two-way switch mechanism, with a compact, minimalist design.

- Three rockers
- Two-way operation
- Available in white, black, gold and grey
- Robust construction that does not discolour over time
- Up to 100,000 operations

Structure / components

The mechanism is supplied without a frame and fits into a LUXION glass frame.

- Mechanism made of flame-retardant PVC plastic
- Glass frame: not included
- Metal frame: not included
- Compatible only with LUXION glass frames

Dimensions

The mechanism is fixed with a screw system.

- Width: 50 mm
- Height: 50 mm
- Mechanism body height: 49 mm
- Fixing screw spacing: 60 mm

Installation / wiring diagram

The diagram shows two mechanisms connected for two-way control of three light fittings: the live (L) feeds the first mechanism, the two mechanisms are linked to each other by two-way conductors, and each light fitting is connected from the second mechanism and to the neutral (N).

- Neutral (N)
- Live (L)
- Two-way connection between two mechanisms