LUXION by Case-Smart®

DATASHEET
LX-4MP010A-B

LUXION quadruple Schuko socket with aluminium frame

LUXION quadruple Schuko socket with aluminium frame and child protection, featuring a compact, elegant and minimalist design.





Black



Gold



White

CODES

Colour	Code
Black	LX-4MP010A-B
Gold	LX-4MP010A-G
White	LX-4MP010A-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Quadruple Schuko socket with aluminium frame
Number of sockets	4
Operating voltage	100–250 V
Frequency	50/60 Hz
Rated current	16 A
Earthing	Yes, with child protection
Front material	Aluminium (frame)
Base material	Flame-retardant PVC, brass internal contacts
Front dimensions (W × H)	299 × 86 mm
Depth	39 mm in total (frame 9 mm + mechanism 30 mm)
Mechanism dimensions	Height 47 mm, depth 30 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted
Protection rating	IP45

Package contents	Aluminium frame, socket mechanisms, metal frame
Colours	black, gold, white

DIMENSION DRAWING

Dimensions in mm

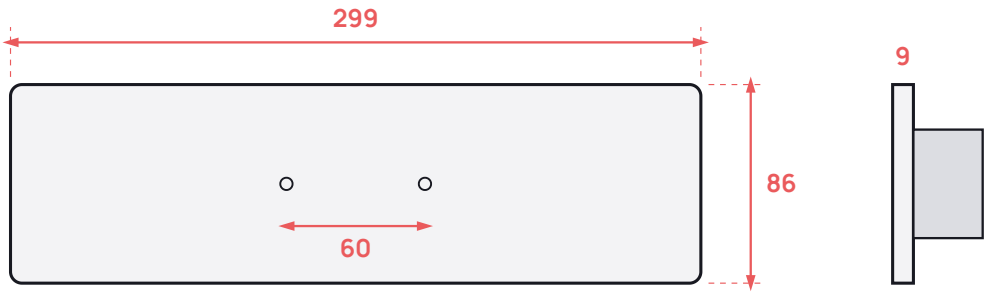

Front view

Side view

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. They are versatile in use and feature child protection.

Their construction is durable and the products do not discolour over time. This is a practical product, made from quality materials and built to last, offering functionality and comfort in your home.

The LUXION quadruple socket combines four earthed Schuko sockets in a single aluminium frame.

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion sockets. The LUXION quadruple socket features an aluminium frame.

- Child protection
- Durable construction that does not discolour over time

Structure / components

The socket consists of three main parts.

- Aluminium frame
- Socket mechanism
- Metal mounting frame

Screw fixing system

The metal frame features a screw fixing system, with 60 mm spacing between the fixing holes.

- Metal frame
- Fixing spacing: 60 mm

Dimensions

- Length: 299 mm
- Height: 86 mm
- Frame thickness: 9 mm
- Mechanism depth: 30 mm
- Mechanism height: 47 mm

Installation / connection diagram

Wiring diagram

- Live (L)
- Neutral (N)
- Earth

Installation steps

- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Use the screws to fix the frame.
- 4. Fit the front cover.