LUXION by Case-Smart®

DATASHEET
LX-4MP010G-B

LUXION quadruple socket with glass frame

LUXION quadruple socket with glass frame, child protection, 16A and IP45, in a compact and minimalist design.




Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-4MP010G-B
Gold	LX-4MP010G-G
Grey	LX-4MP010G-GY
White	LX-4MP010G-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Quadruple Schuko socket with glass frame
Number of sockets	4
Operating voltage	100–250 V
Frequency	50/60 Hz
Rated current	16 A
Earthing	Yes, with child protection
Front material	Glass (glass frame)
Base material	Fire-resistant PVC, brass internal contacts
Front dimensions (W × H)	299 × 86 mm
Depth	39 mm in total (frame 9 mm + mechanism 30 mm)
Mechanism dimensions	Width 47 mm, depth 30 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted

Colours	white, black, grey, gold

DIMENSION DRAWING

Dimensions in mm

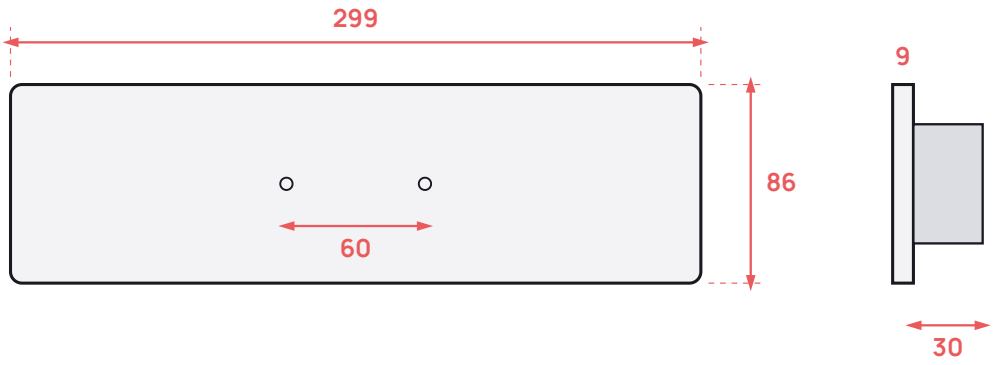

Front view

Side view

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. They are versatile in use and feature child protection.

The quadruple socket with glass frame combines four sockets in a single, elegant panel. Its construction is durable and the products do not discolour over time.

- Compact, elegant and minimalist design
- Child protection
- Durable construction that does not discolour over time
- Quality materials, long service life

A practical product that offers functionality and convenience in your home.

Features

Enjoy the versatility of the new Luxion sockets! The LUXION quadruple socket with glass frame combines four sockets in one elegant panel, with a compact, elegant and minimalist design.

Structure / components

The socket consists of three main parts and is fixed with a screw system.

- Glass frame
- Socket mechanism
- Metal frame
- Screw fixing system: fixing distance 60 mm

Dimensions

- Length: 299 mm
- Height: 86 mm
- Frame thickness: 9 mm
- Mechanism depth: 30 mm
- Mechanism width: 47 mm

Installation / wiring diagram

Each socket mechanism is connected to live, neutral and earth.

- Live (L)
- Neutral (N)
- Earth
- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Use the screws to fix the frame.
- 4. Fit the front panel.