LUXION single mechanical push-button (momentary) switch mechanism

LUXION single mechanical push-button (momentary) switch mechanism, durable and fade-resistant, for LUXION glass frames.




Black


Gold


Grey


White

CODES


Colour	Code	EAN
Black	LX-MP008NB	0658606019645
Gold	LX-MP008NG	0658606019621
Grey	LX-MP008NGY	6766401175580
White	LX-MP008NW	0658606019614

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Single switch mechanisms
Product type	LUXION single mechanical push-button (momentary) switch mechanism, without glass frame
Function	Mechanical push-button (momentary)
Number of buttons	1
Operating voltage	250 V AC
Rated current	10 A
Base material	Flame-retardant PVC plastic
Mechanism dimensions	50 × 50 mm
Depth	35 mm (15 mm + 20 mm)
Fixing screw spacing	60 mm
Mounting	Flush-mounted, screw fixing
Compatibility	LUXION glass frames only (glass and metal frames not included)
Durability	Up to 100.000 operations

DIMENSION DRAWING

Dimensions in mm

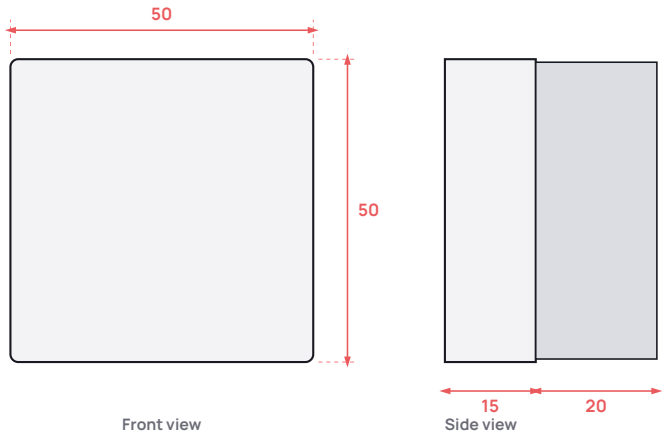

DESCRIPTION

The LUXION single mechanical push-button (momentary) switch mechanism features a compact, elegant and minimalist design. Its construction is durable and does not fade over time. It is a practical product, made from quality materials with a long service life.

Compatible only with LUXION glass frames.

The frame is not included and is sold separately.

Features

Single mechanical switch mechanism with push-button (momentary) operation from the LUXION range, with a compact, minimalist design.

- Push-button operation with automatic return
- Durable construction that does not fade over time
- Rated for up to 100,000 operations
- Available in white, gold, black and grey

Structure / components

The mechanism is sold without a frame; frames are available separately.

- Glass frame (not included)
- Metal frame (not included)
- Compatible only with LUXION glass frames

Dimensions

The mechanism is fixed with a screw system, with 60 mm between the fixing points.

- Width: 50 mm
- Height: 50 mm
- Rear section height: 49 mm
- Fixing screw spacing: 60 mm

Installation / wiring diagram

The live (L) is connected to the switch mechanism and the switched output runs from the mechanism to the light fitting. The neutral (N) is connected directly to the light fitting.

- Live (L): connected to the mechanism
- Switched output: from the mechanism to the light fitting
- Neutral (N): directly to the light fitting