LUXION
by Case-Smart®

DATASHEET
LX-1MP010A-B

LUXION single Schuko socket with aluminium frame

LUXION single Schuko socket with aluminium frame, child protection, 16A and IP45, in a compact, elegant and minimalist design.





Black



Gold



White


CODES

Colour	Code
Black	LX-1MP010A-B
Gold	LX-1MP010A-G
White	LX-1MP010A-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Single Schuko socket with aluminium frame
Number of sockets	1
Operating voltage	100–250 V
Frequency	50/60 Hz
Rated current	16 A
Earthing	Yes, with child protection
Front material	Aluminium
Base material	Flame-retardant PVC, internal contacts in brass
Front dimensions (W × H)	86 × 86 mm
Depth	39 mm overall (frame 9 mm)
Mechanism dimensions	Height 47 mm, depth 30 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted
Protection rating	IP45

DIMENSION DRAWING

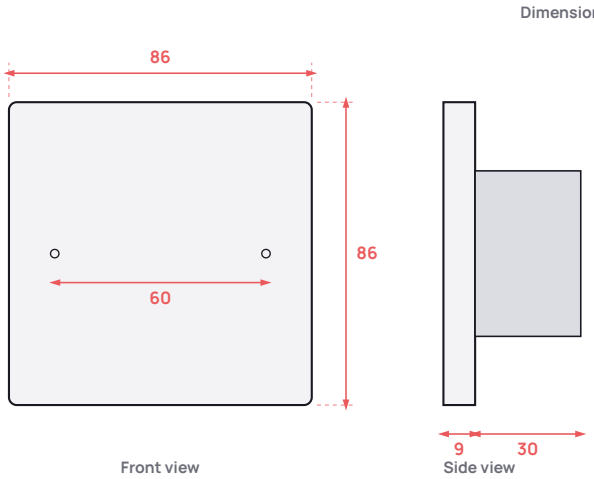

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. They are versatile in use and feature child protection.

They are robustly built and the products do not discolour over time. This is a practical product, made from quality materials and built to last, offering functionality and comfort in your home.

- Single Schuko socket with aluminium frame
- Earthing with child protection
- Screw fixing

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion sockets. The LUXION single socket with aluminium frame gives a compact, elegant and minimalist look to any room.

Structure / components

The socket consists of three parts and is fixed with a screw system.

- Aluminium frame
- Socket mechanism
- Metal mounting frame
- Screw fixing system: screw spacing 60 mm

Dimensions

- Front: 86 mm x 86 mm (width x height)
- Frame thickness: 9 mm
- Mechanism depth: 30 mm
- Mechanism height: 47 mm

Installation / wiring diagram

Connect the wires to the terminals on the back of the socket mechanism.

- Live (L)
- Neutral (N)
- Earth

Installation steps

- 1. Open the packaging.
- 2. Connect the wires and tighten the screws.
- 3. Use the 2 screws to fix the frame.
- 4. Fit the front panel.