LUXION by Case-Smart®

DATASHEET
LX-1MP049G-B

LUXION single Schuko socket with protective cover and glass frame

LUXION single Schuko socket with protective cover, child protection, IP45 and an elegant 86 x 86 mm glass frame.




Black


Gold


Grey


White

CODES


Colour	Code	EAN
Black	LX-1MP049G-B	6574792963514
Gold	LX-1MP049G-G	9926769155151
Grey	LX-1MP049G-GY	6574793052514
White	LX-1MP049G-W	6574794346612

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Single Schuko socket with protective cover and glass frame
Number of sockets	1
Operating voltage	100–250 V
Frequency	50/60 Hz
Rated current	16 A
Earthing	Yes, with child protection
Front material	Glass
Base material	Fire-resistant PVC
Front dimensions (W × H)	86 × 86 mm
Depth	39 mm in total (frame 9 mm + mechanism 30 mm)
Mechanism dimensions	Height 47 mm, depth 30 mm
Fixing screw spacing	60 mm

Protection rating	IP45
Colours	white, black, grey, gold

DIMENSION DRAWING

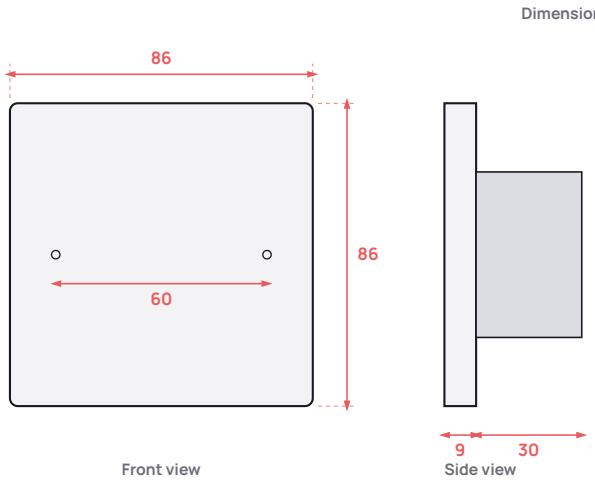

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. They are versatile in use and feature child protection.

They are robustly built and the products do not discolour over time. This is a practical product, made from quality materials and durable over time, offering functionality and comfort in your home.

- Single Schuko socket with glass frame
- Protective cover and IP45 protection rating
- Rated current 16A

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion sockets. Single socket with glass frame and protective cover by LUXION.

- Single Schuko socket with glass frame
- Protective cover
- Child protection
- Available in white, black, gold and grey

Structure / components

- Glass frame
- Socket mechanism
- Metal frame
- Screw fixing system: 60 mm

Dimensions

- Width: 86 mm
- Height: 86 mm
- Frame thickness: 9 mm
- Mechanism depth: 30 mm
- Mechanism height: 47 mm

Wiring diagram

Connect the three conductors to the corresponding terminals on the back of the socket mechanism.

- Live (L)
- Neutral (N)
- Earth

Installation steps

- 1. Open the packaging.
- 2. Connect the wires and tighten the screws.
- 3. Use the 2 screws to fix the frame.
- 4. Fit the front panel.