
LUXION single + single + single touch switch with glass frame

LUXION touch switch with three single switches in a glass frame, a precision sensor like a smartphone's and a finish that does not fade.




Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-ST-101/101/101-B
Gold	LX-ST-101/101/101-G
Grey	LX-ST-101/101/101-GY
White	LX-ST-101/101/101-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Combinations in one frame
Product type	Single + single + single touch switch with glass frame
Function	Touch, one-way (1 way)
Number of buttons	3
Operating voltage	110–240 V
Frequency	50/60 Hz
Rated current	10 A per switch (max.)
Neutral (N)	Yes
LED indicator	Blue when the light is on, dim blue when it is off
Front material	Glass
Base material	Metal mounting frame
Front dimensions (W × H)	228 × 86 mm
Depth	35 mm (panel 9 mm + mechanism 26 mm)

Mounting screw spacing	60 mm (202 mm between the outermost holes)
Mounting	Flush-mounted, with screws
Protection rating	IP45
Operating temperature	-20 ~ +70 °C
Operating humidity	10% ~ 93%
Service life	Up to 100,000 operations
Colours	black, gold, grey, white

DIMENSION DRAWING

Dimensions in mm

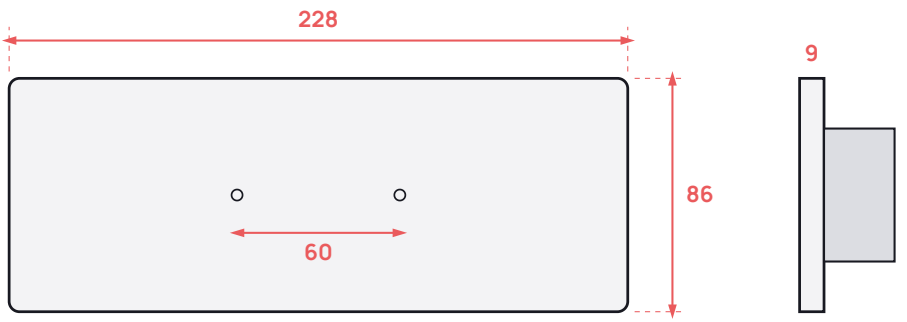

Front view

Side view

DESCRIPTION

Single + single + single touch switch with LUXION glass frame: three independent single touch switches in one glass panel.

LUXION switches stand out for their compact, elegant and minimalist design. They are versatile in use, while the touch sensor is extremely precise, the same as that of a smartphone.

- Durable construction from quality materials, designed to stand the test of time
- The switches do not fade over time, so the elegant design remains unchanged
- Moisture-resistant, also suitable for humid areas

A practical product that brings functionality and comfort to your home.

Features

Enjoy the versatility of the new LUXION switches: three single touch switches combined in one glass panel with a compact, elegant and minimalist design.

- Touch sensor: extremely precise, the same as a smartphone's sensor
- Moisture-resistant: can be used in humid areas
- Does not fade: the elegant design remains unchanged

Structure / components

- Glass panel
- Switch mechanisms
- Metal mounting frame

- Distance between mounting holes: 202 mm
- Mounting screw spacing: 60 mm
- Panel thickness: 9 mm
- Mechanism depth: 26 mm
- Mechanism height: 49 mm

Touch Switch) is connected to the live (L) and controls its own light fitting; each light fitting is connected to the neutral (N).

- Neutral (N)
- Live (L)
- Terminals: L, L1, L2, L3

Installation steps

- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Use the screws to fix the frame.
- 4. Fit the front panel.