LUXION single + single touch switch with glass frame

Two single touch switches in a LUXION glass frame, with a precise sensor like a smartphone's and a finish that does not fade.





Black



Gold



Grey



White

CODES

Colour	Code
Black	LX-ST-101/101-B
Gold	LX-ST-101/101-G
Grey	LX-ST-101/101-GY
White	LX-ST-101/101-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Combinations in one frame
Product type	Single + single touch switch with glass frame
Function	Touch, ON / OFF, 2 independent single switches
Number of buttons	2 (1 + 1)
Operating voltage	110–240 V
Frequency	50/60 Hz
Rated current	10 A (maximum)
LED indicator	Blue when the light is on, dim blue when it is off
Front material	Glass
Front dimensions (W × H)	157 × 86 mm
Depth	35 mm in total (panel 9 mm, mechanism 26 mm)
Mechanism dimensions	Height 49 mm, depth 26 mm
Fixing screw spacing	60 mm (distance between the two

Mounting	Flush-mounted, metal mounting frame, screw fixing
Protection rating	IP45
Operating temperature	-20 ~ +70 °C
Operating humidity	10% ~ 93%
Service life	Up to 100,000 operations
Colours	white, black, grey, gold

DIMENSION DRAWING

Dimensions in mm

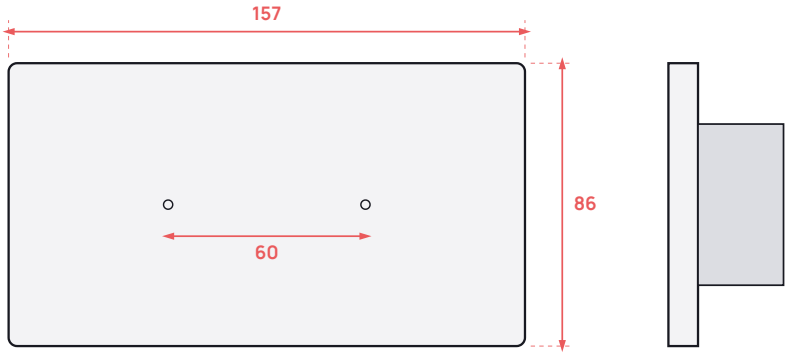

Front view

Side view

DESCRIPTION

Single + single touch switch with Luxion glass frame. LUXION switches stand out for their compact, elegant and minimalist design. They are versatile in use, and the touch sensor is extremely precise, the same as that of a smartphone.

The construction is durable and the switches do not fade over time. This is a practical product, made from quality materials and built to last, offering functionality and comfort in your home.

- Two independent single touch switches in one double glass panel
- Also suitable for damp areas
- Service life of up to 100,000 operations

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion switches. The LUXION single + single touch switch combines two single switches in one elegant double glass panel.

Touch sensor

The touch sensor is extremely precise, the same as the sensor of a smartphone.

Moisture resistant

Can be used in damp areas.

Does not fade

The elegant design stays unchanged over time.

Structure / components

- Glass panel
- Switch mechanisms
- Metal mounting frame
- Screw fixing system

- Height: 86 mm
- Panel thickness: 9 mm
- Mechanism depth: 26 mm
- Mechanism height: 49 mm
- Distance between fixing points: 130 mm
- Fixing screw spacing: 60 mm

Touch Switch). Each mechanism is connected to the live (L) and to its light fitting via output L1; the light fitting is connected to the neutral (N).

- Neutral (N)
- Live (L)
- Outputs L1, L2, L3
- Input L

Installation instructions

- 1. Open the packaging.
- 2. Connect the wires and tighten the screws.
- 3. Fix the frame with the screws.
- 4. Fit the front panel.