LUXION single socket with protective cover and aluminium frame

LUXION single socket with a protective cover, child protection and a durable aluminium frame that does not discolour over time.





Black



Gold



White

CODES

Colour	Code
Black	LX-1MP049A-B
Gold	LX-1MP049A-G
White	LX-1MP049A-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Single Schuko socket with protective cover and aluminium frame
Number of sockets	1
Operating voltage	100–250 V
Frequency	50/60 Hz
Rated current	16 A
Earthing	Yes, with child protection
Front material	Aluminium frame, plastic protective cover
Base material	Fire-resistant PVC
Front dimensions (W × H)	86 × 86 mm
Depth	39 mm in total (frame 9 mm + mechanism 30 mm)
Mechanism dimensions	Height 47 mm, depth 30 mm
Fixing screw spacing	60 mm

Protection rating	IP45
Package contents	Aluminium frame, socket mechanism, metal mounting frame
Colours	white, black, gold

DIMENSION DRAWING

Dimensions in mm

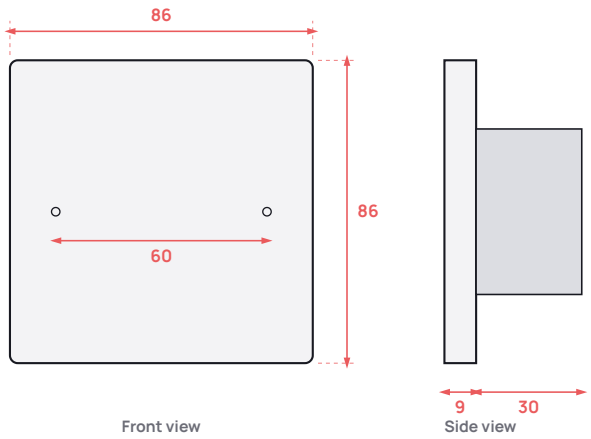

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. They are versatile in use and feature child protection.

They are durably built and the products do not discolour over time. This is a practical product, made from quality materials and built to last, bringing functionality and comfort to your home.

- Single earthed socket
- Protective cover
- Aluminium frame

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion sockets: the LUXION single socket with aluminium frame and protective cover.

- Single socket
- Aluminium frame
- Protective cover
- Child protection

Construction / components

- Aluminium frame
- Socket mechanism
- Metal mounting frame
- Screw fixing system: 60 mm

Dimensions

- Width: 86 mm
- Height: 86 mm
- Frame thickness: 9 mm
- Mechanism depth: 30 mm
- Mechanism height: 47 mm

Wiring diagram

Connect the three conductors to the corresponding terminals on the back of the socket mechanism.

- Live (L)
- Neutral (N)
- Earth

- 2. Connect the wires and tighten the screws.
- 3. Use the 2 screws to fix the frame.
- 4. Fit the front cover.