LUXION by Case-Smart®

DATASHEET
LX-ST-101/2MP010-B

LUXION single touch switch + 2 Schuko sockets with glass frame

LUXION panel with a single touch switch and 2 Schuko sockets in a glass frame, with a compact, elegant and minimalist design.




Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-ST-101/2MP010-B
Gold	LX-ST-101/2MP010-G
Grey	LX-ST-101/2MP010-GY
White	LX-ST-101/2MP010-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Switch and socket
Product type	Single touch switch + 2 Schuko sockets with glass frame
Function	On/off touch switch (1 channel) + 2 Schuko sockets
Number of buttons	1
Number of sockets	2
Operating voltage	110–250 V
Frequency	50/60 Hz
Rated current	Socket 16 A / switch 10 A
Neutral (N)	Yes (live, neutral, earth)
Front material	Glass
Base material	Metal mounting frame
Front dimensions (W × H)	228 × 86 mm
Depth	35 mm (panel 9 mm + mechanism 26 mm)

Fixing screw spacing	60 mm (per mechanism); 202 mm (between the outermost fixing points)
Mounting	Flush-mounted, screw fixing
Operating temperature	-20 ~ +70 °C
Operating humidity	10% ~ 93%
Service life	Up to 100,000 operations
Colours	white, black, gold, grey

DIMENSION DRAWING

Dimensions in mm

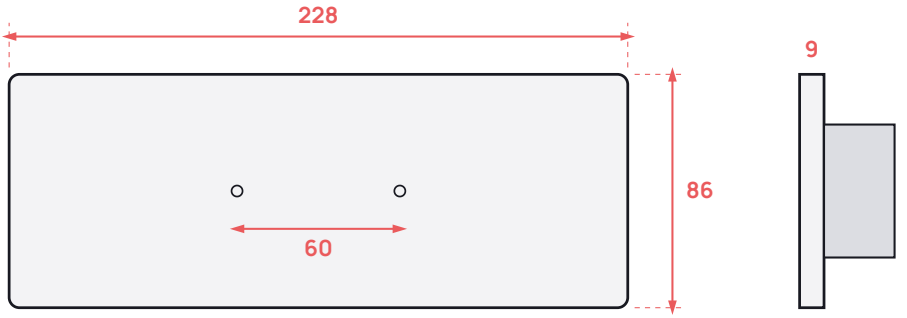

Front view

Side view

DESCRIPTION

The LUXION single switch + 2 sockets with glass frame stands out for its compact, elegant and minimalist design. Its construction is durable and the products do not discolour over time.

It is a practical product, made from high-quality, highly durable materials, offering functionality and comfort in your home.

- Single touch switch and 2 Schuko sockets in a single glass frame
- High-precision touch sensor, as in smartphones
- Discolouration-resistant finish
- Service life of up to 100,000 operations

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion switches!
LUXION single switch + 2 sockets with glass frame.

Touch sensor

The touch sensor is extremely precise, the same as the sensor in a smartphone.

Does not discolour

The elegant design remains unchanged over time.

Structure / components

- Glass panel
- Switch mechanism
- Metal mounting frame
- Screw fixing system

- Height: 86 mm
- Distance between fixing points: 202 mm
- Fixing distance on the mechanism: 60 mm
- Panel thickness: 9 mm
- Mechanism depth: 26 mm
- Mechanism height: 49 mm

earth and live (L); the touch switch is connected to the live and to the light fitting via terminals L and L1.

- Neutral (N)
- Earth
- Live (L)
- 16A 250V~
- Single touch switch (1 way)
- Terminals L3, L2, L1, L

Installation steps

- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Fix the frame with the screws.
- 4. Fit the front panel.