LUXION
by Case-Smart

DATASHEET
LX-MT-S102/MP010-B

LUXION single two-way / intermediate switch with socket and glass frame

LUXION single two-way / intermediate switch with socket in a glass frame, with an elegant minimalist design that does not discolour.




Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-MT-S102/MP010-B
Gold	LX-MT-S102/MP010-G
Grey	LX-MT-S102/MP010-GY
White	LX-MT-S102/MP010-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Switch and socket
Product type	Single two-way / intermediate switch + Schuko socket with glass frame
Function	Two-way / intermediate (up to 3 switches in the circuit)
Number of buttons	1
Number of sockets	1
Operating voltage	110–250 V
Frequency	50/60 Hz
Rated current	16 A socket / 10 A switch
Neutral (N)	Yes
Front material	Glass
Base material	Metal mounting frame
Front dimensions (W × H)	157 × 86 mm
Depth	35 mm (panel 9 mm + mechanism 26 mm)

Fixing screw spacing	60 mm (130 mm between the holes of the two positions)
Mounting	Flush-mounted, with screws
Operating temperature	-20 ~ +70 °C
Operating humidity	10% ~ 93%
Service life	Up to 100,000 operations
Colours	black, gold, grey, white

DIMENSION DRAWING

Dimensions in mm

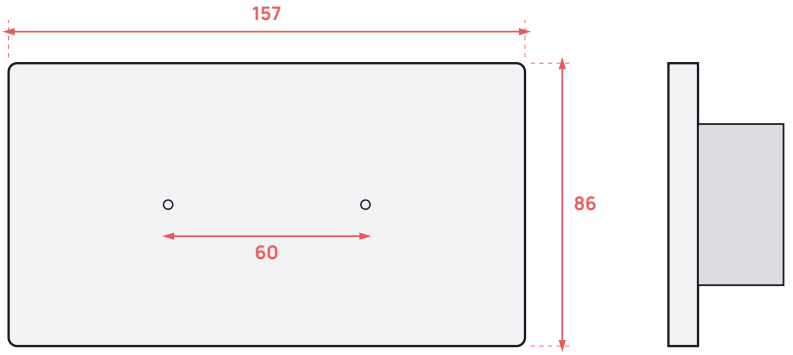

DESCRIPTION

The LUXION single two-way / intermediate switch with socket and glass frame combines a compact, elegant and minimalist design with durable construction. The products do not discolour over time, so their elegant appearance remains unchanged.

It is a practical product, made from quality, long-lasting materials, offering functionality and comfort in your home.

The set includes a glass frame (LX-GP016), a switch mechanism (LX-MT-S102) and a socket mechanism (LX-MP010).

Up to 3 switches (with an intermediate switch) can be connected in the circuit.

Features

Enjoy the versatility of the new Luxion switches: a single switch with socket in a LUXION glass frame, with a compact, elegant and minimalist design.

- Does not discolour – the elegant design remains unchanged
- Durable construction from quality materials
- Service life of up to 100,000 operations
- Up to 3 switches in the circuit (two-way / intermediate)

Structure / components

- Glass panel
- Switch + socket mechanism
- Metal frame

- Height: 86 mm
- Panel thickness: 9 mm
- Mechanism depth: 26 mm
- Mechanism: 49 mm
- Distance between fixing holes: 130 mm
- Fixing distance: 60 mm
- Screw fixing system

connection.

- Neutral (N) and earth for the socket
- Live (L)
- Switch terminals: L, L1, L2, L3, L(A)
- 1. Open the packaging.
- 2. Connect the wires and tighten the screws.
- 3. Use the screws to fix the frame.
- 4. Fit the front panel.