


LUXION touch curtain switch with glass frame


Elegant LUXION touch switch for curtains, with a toughened safety glass panel, in white, black, grey and gold.

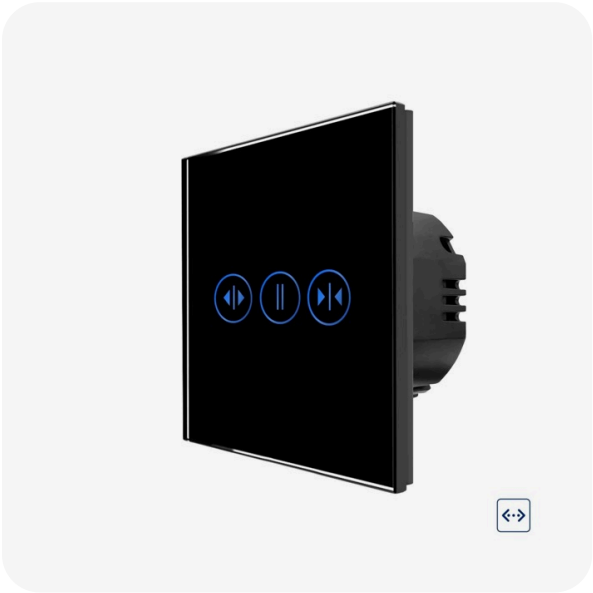


Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-MT-C201G-B
Gold	LX-MT-C201G-G
Grey	LX-MT-C201G-GY
White	LX-MT-C201G-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Touch switches for doorbell, curtains and more
Product type	LUXION touch switch for curtains with glass frame
Function	Curtain motor control
Operating voltage	110–240 V AC
Frequency	50/60 Hz
Maximum load	800 W / channel
Neutral (N)	Yes (terminals L2, L1, L, N)
LED indicator	Blue (on) / dim blue (off)
Front material	Toughened safety glass
Glass thickness	4 mm
Base material	Flame-retardant PVC plastic, metal frame
Front dimensions (W × H)	86 × 86 mm
Depth	35 mm (panel 9 mm + mechanism 26 mm)
Mechanism dimensions	Height 49 mm, depth 26 mm

Mounting	Flush-mounted, fixed with 2 screws
Protection rating	IP20
Operating temperature	-20 ~ +70 °C
Operating humidity	≤95%
Service life	Up to 100,000 operations
Colours	white, black, gold, grey

DIMENSION DRAWING

Dimensions in mm

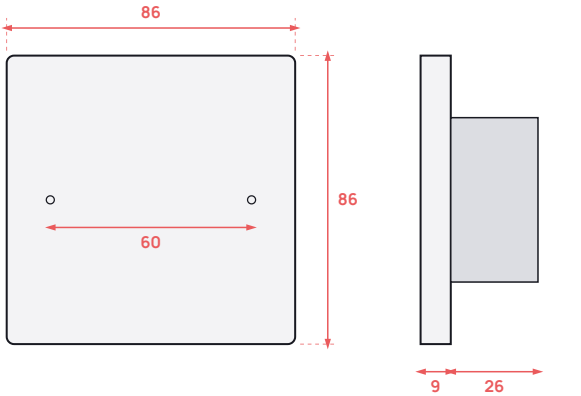

Front view

Side view

Glass thickness 4 mm

DESCRIPTION

The Luxion touch curtain switch stands out for its compact, elegant and minimalist design. The front is made of 4 mm thick toughened safety glass and it is operated with a simple touch.

LUXION products are practical, made from quality materials and built to last, offering functionality and comfort in your home.

- Touch switch for controlling curtain motors
- Toughened safety glass panel, mechanism made of fire-resistant PVC plastic
- Load up to 800W per channel
- Service life of up to 100,000 operations
- Available in white, black, grey and gold

Features

Compact, elegant and minimalist design. Enjoy the versatility of the new Luxion products: a touch curtain switch with a glass panel.

- Touch control for curtains
- 4 mm toughened safety glass panel
- Service life of up to 100,000 operations

Technical parameters

- Operating voltage: 110V-240V AC, 50/60Hz
- Load: 800W/channel
- Operating temperature: -20°C ~ 70°C
- Operating humidity: ≤95%
- Protection rating: IP20

with a screw system.

- Elegant glass panel
- Switch mechanism
- Metal frame
- Fixing screw spacing: 60 mm

Dimensions

- Width: 86 mm
- Height: 86 mm
- Panel thickness: 9 mm
- Mechanism depth: 26 mm
- Mechanism height: 49 mm

while outputs L1 and L2 are connected to the curtain motor.

- N: neutral
- L: live
- L1 / L2: outputs to the motor
- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Use the 2 screws to fix the frame.
- 4. Fit the front panel.