LUXION
by Case-Smart®

DATASHEET
LX-3MP010G-B

LUXION Triple Socket with Glass Frame

LUXION triple socket with glass frame, minimalist design, child protection and a durable construction that does not fade.




Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-3MP010G-B
Gold	LX-3MP010G-G
Grey	LX-3MP010G-GY
White	LX-3MP010G-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	Triple Schuko socket with glass frame (complete set)
Number of sockets	3
Operating voltage	100–250 V
Frequency	50/60 Hz
Rated current	16 A
Earthing	Yes, earth contact (Schuko)
Child protection	Yes
Front material	Glass
Base material	Flame-retardant PVC, internal brass contacts
Front dimensions (W × H)	228 × 86 mm
Depth	39 mm (9 mm frame + 30 mm mechanism)
Mechanism dimensions	Height 47 mm, depth 30 mm
Fixing screw spacing	60 mm

Protection rating	IP45
Colours	white, black, gold, grey

DIMENSION DRAWING

Dimensions in mm

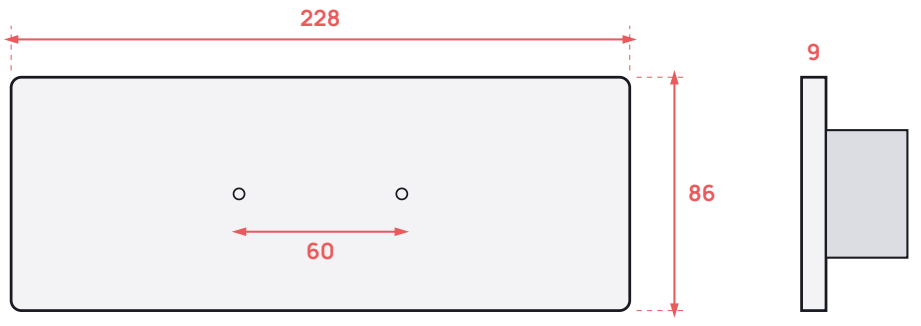

Front view

Side view

DESCRIPTION

LUXION sockets stand out for their compact, elegant and minimalist design. The triple socket with glass frame combines three sockets in a single frame.

- A versatile solution for every room in the home
- Child protection
- Durable construction that does not fade over time

This is a practical product, made from quality materials and with a long service life, offering functionality and comfort in your home.

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion sockets: the LUXION triple socket with glass frame.

- Three sockets in a single glass frame
- Available in white, black, gold and grey

Structure / components

The socket consists of three main parts.

- Glass frame
- Socket mechanisms
- Metal mounting frame

Dimensions

- Width: 228 mm
- Height: 86 mm
- Depth: 9 mm + 30 mm
- Mechanism height: 47 mm
- Fixing screw spacing: 60 mm

Installation / wiring diagram

Wiring diagram with live, neutral and earth connections.

- Live (L)
- Neutral (N)
- Earth
- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Fix the frame with the screws.
- 4. Fit the front panel.