LUXION triple two-way mechanical switch with glass frame

LUXION triple two-way mechanical switch with a safety glass frame, in a compact, elegant and minimalist design.




Black


Gold


Grey

White

CODES


Colour	Code
Black	LX-MP007GF-B
Gold	LX-MP007GF-G
Grey	LX-MP007GF-GY
White	LX-MP007GF-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Mechanical switches › Mechanical two-way / intermediate
Product type	Triple two-way mechanical switch with glass frame
Function	Mechanical, two-way
Number of rockers	3
Operating voltage	Up to 250 V AC
Rated current	10 A
Front material	Safety glass
Glass thickness	4 mm
Base material	Flame-retardant PVC plastic
Front dimensions (W × H)	86 × 86 mm
Depth	34 mm overall (front 9 mm)
Mechanism dimensions	Height 49 mm, depth 20 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted, screw fixing

Operating temperature	-20 °C ~ +70 °C
Operating humidity	10% ~ 93%
Service life	Up to 100,000 operations
Colours	white, black, grey, gold

DIMENSION DRAWING

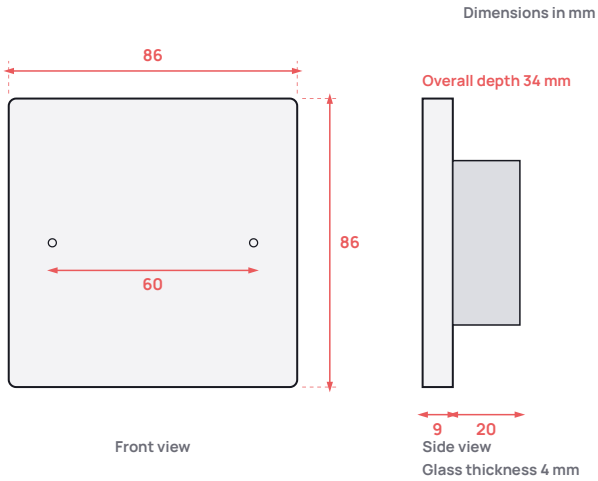

DESCRIPTION

LUXION mechanical switches stand out for their compact, elegant and minimalist design. They are practical, made from quality materials and built to last, offering functionality and comfort in your home.

The LUXION triple two-way mechanical switch with glass frame has three rockers for controlling three lighting circuits from two locations, with a safety glass front that does not fade, so its elegant appearance remains unchanged.

- Mechanical switch with 3 rockers
- Two-way function
- Safety glass frame
- Rated for up to 100,000 operations

Features

Enjoy the versatility of the new mechanical switches: the LUXION triple two-way mechanical switch with glass frame, in a compact, elegant and minimalist design.

- Mechanical switch with 3 rockers
- Two-way function
- Glass frame

Does not fade

The elegant design stays unchanged over time.

Ideal for

- Office
- Bedroom
- Kitchen
- Living room

Structure / components

- Glass frame
- Switch mechanism
- Metal mounting frame
- Screw fixing system, 60 mm screw spacing

- Height: 86 mm
- Front panel thickness: 9 mm
- Depth: 20 mm
- Mechanism height: 49 mm

(N) and live (L).

- Neutral (N)
- Live (L)
- Two-way
- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Use the 2 screws to fix the frame.
- 4. Fit the front panel (it clips into place).