LUXION by Case-Smart

DATASHEET
LX-MT-A302G-B

LUXION triple two-way touch switch with glass frame, A Series

Triple two-way touch switch with glass frame, a precise smartphone-style sensor and a design that does not fade.




Black


Gold


Grey


White

CODES


Colour	Code
Black	LX-MT-A302G-B
Gold	LX-MT-A302G-G
Grey	LX-MT-A302G-GY
White	LX-MT-A302G-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Two-way / intermediate touch switches
Product type	Triple two-way touch switch with glass frame, A Series
Function	Touch on/off, two-way; no pairing required; no sound on touch
Number of buttons	3
Operating voltage	110–240 V AC
Frequency	50–60 Hz
Maximum load	600 W/channel, resistive load
Standby consumption	0.02 W
Neutral (N)	Yes (according to the wiring diagram)
LED indicator	Blue when the light is on, faint blue when it is off
Front material	Crystal safety glass, heat-resistant
Glass thickness	4 mm
Base material	Flame-retardant PVC plastic

Front dimensions (W × H)	86 × 86 mm
Depth	35 mm
Mounting	Flush-mounted, fixed with 2 screws
Protection rating	IP20
Operating temperature	-20 ~ +70 °C
Operating humidity	≤ 95%
Colours	black, gold, grey, white

DIMENSION DRAWING

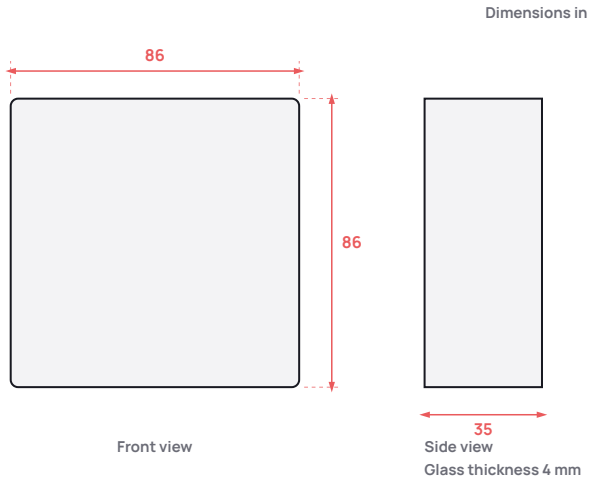

DESCRIPTION

LUXION switches stand out for their compact, elegant and minimalist design. They are versatile in use and the touch sensor is extremely precise, just like a smartphone screen. The construction is durable and the switches do not discolour over time. This is a practical product, made from quality materials and built to last, offering functionality and comfort in your home.

The A Series triple two-way switch controls three lighting circuits and, combined with a second two-way switch, allows the lights to be operated from two points, such as on stairs and in corridors. The blue LED indicator glows brightly when the light is on and dimly when it is off, and the touch operation is silent.

No pairing required

Precise touch sensor

The touch sensor is extremely precise, the same as the sensor in a smartphone.

Does not fade

The glass panel does not discolour, so the elegant design stays unchanged.

Technical parameters

- Maximum load: 600W per channel – resistive load
- Frequency: 50/60Hz
- Self-consumption: 0.02W
- Operating temperature: -20°C ~ +70°C
- LED indicator: blue with the light on, dim blue with the light off
- Silent touch

glass frame.

- Triple two-way switch mechanism LX-MT-A302
- Glass frame LX-GP005
- Front panel made of 4 mm thick safety glass
- Base made of flame-retardant PVC plastic

Dimensions

Dimensions: 86 x 86 x 35 mm.

Installation

Caution! Switch off the power supply during installation or removal!

- 1. Open the package.
- 2. Connect the wires and tighten the screws.
- 3. Use the 2 screws to fix the frame.
- 4. Fit the front panel.

the ~220V mains (N, L). Terminals L1, L2, L3 are connected to the lamps and the two-way terminal (L4) is connected between the mechanisms.

- N – neutral
- L – live
- L1, L2, L3 – outputs to the lamps
- L4 – two-way (connection between the mechanisms)