LUXION by Case-Smart


DATASHEET
LX-ST-301/2MP010-B


LUXION triple touch switch + 2 Schuko sockets with glass frame


LUXION triple touch switch with 2 Schuko sockets in a glass frame, with a compact, minimalist design that does not discolour.




Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-ST-301/2MP010-B
Gold	LX-ST-301/2MP010-G
Grey	LX-ST-301/2MP010-GY
White	LX-ST-301/2MP010-W

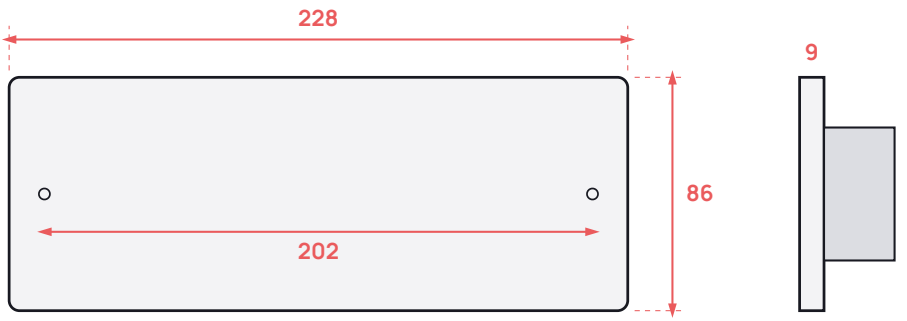
SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Switch and socket
Product type	Triple touch switch + 2 Schuko sockets with glass frame
Function	ON/OFF touch switch (one-way) + earthed sockets
Number of buttons	3
Number of sockets	2
Operating voltage	110–250 V AC
Frequency	50/60 Hz
Rated current	16 A socket / 10 A switch
Front material	Glass
Base material	Metal mounting frame
Front dimensions (W × H)	228 × 86 mm
Depth	35 mm in total (panel 9 mm, mechanism 26 mm)
Mechanism dimensions	Height 49 mm

	mm
Mounting	Flush-mounted, with screws
Operating temperature	-20 ~ +70 °C
Operating humidity	10% ~ 93%
Service life	up to 100,000 operations
Colours	white, black, grey, gold

DIMENSION DRAWING

Dimensions in mm



Front view

Side view

DESCRIPTION

The LUXION triple touch switch with 2 sockets and glass frame features a compact, elegant and minimalist design. It is durably built and the products do not discolour over time.

It is a practical product, made from quality, long-lasting materials, that brings functionality and comfort to your home.

- Triple touch switch for three lighting circuits
- 2 built-in Schuko sockets
- Glass front

Compact, elegant and minimalist design

Enjoy the versatility of the new Luxion switches! Triple switch with 2 sockets and LUXION glass frame.

- Triple touch switch
- 2 built-in Schuko sockets
- Glass front

Touch sensor

The touch sensor is extremely precise, the same as the sensor in a smartphone.

Does not discolour

The elegant design stays unchanged.

Structure / components

- Glass panel
- Switch mechanism
- Metal frame
- Screw fixing system

Dimensions

- Width: 228 mm
- Height: 86 mm
- Distance between fixing points: 202 mm
- Distance between mechanisms: 60 mm
- Panel thickness: 9 mm
- Mechanism depth: 26 mm
- Mechanism height: 49 mm

the live (L), and outputs L1, L2 and L3 each control one lighting circuit.

- Live (L)
- Earth
- Neutral (N)
- L3, L2, L1, L – one-way touch switch

- 2. Connect the wires and tighten the screws.
- 3. Fix the frame with the screws.
- 4. Fit the front panel.