LUXION by Case-Smart


DATASHEET
LX-W1-WL3G-B

3-channel RF433 touch remote control LUXION


Minimalist 3-channel RF433 touch remote control that pairs exclusively with LUXION RF433 touch switches.




Black


Gold


Grey


White

CODES

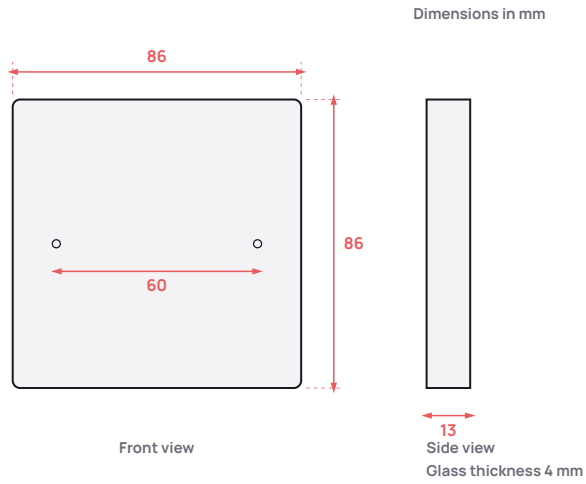
Colour	Code
Black	LX-W1-WL3G-B
Gold	LX-W1-WL3G-G
Grey	LX-W1-WL3G-GY
White	LX-W1-WL3G-W

SPECIFICATIONS

Brand	LUXION
Category	Smart home › Remote controls
Connectivity	RF433
Product type	3-channel touch remote control
Function	Wireless control of LUXION RF433 switches; the touch sensor is not illuminated
Number of buttons	3 channels
Power supply	CR2032 battery (not included)
Protocol	RF433
RF frequency	433.92 MHz
Signal strength	10 dB
Range	30 m in open space / 6 m in practice (reduced by every obstacle or electronic interference)
Compatibility	LUXION RF433 switches only
Front material	Safety glass
Glass thickness	4 mm
Base material	Plastic
Front dimensions (W × H)	86 × 86 mm

Mounting	Adhesive tape or screws
Colours	white, black, grey, gold

DIMENSION DRAWING



DESCRIPTION

The Luxion 3-channel RF touch remote control has a minimalist, elegant design, and its touch sensor is extremely precise, the same as the sensor of a smartphone. It works and pairs only with LUXION RF433 switches.

The touch sensor is not illuminated.

One CR2032 battery is required (not included).

Elegant, minimalist and compact design

Enjoy the flexibility of new smart devices with the Luxion three-channel RF433 touch remote control.

- 3 touch channels
- RF433 wireless control
- Available in white, black, gold and grey

Touch sensor

The touch sensor is extremely precise, the same as the sensor of a smartphone. The sensor is not illuminated.

Pairing instructions

The remote control pairs exclusively with LUXION RF433 switches.

- 1. Hold your finger on the RF switch for 5 seconds until you hear a beep.
- 2. Then press the RF remote control once to complete pairing.

Cancelling pairing

Hold your finger on the RF switch for 10 seconds until you hear two beeps.

Construction

- Elegant glass panel
- Plastic base
- Recess for adhesive tape
- Screw fixing system (optional)

Dimensions

- Width: 86 mm
- Height: 86 mm
- Thickness: 4 mm + 9 mm
- Fixing screw spacing: 60 mm

Installation

The remote control is powered by a button-cell battery and is mounted on the wall with adhesive tape or, optionally, with screws.

- 1 x CR2032 battery (NOT included in the package)
- Adhesive tape for wall mounting
- Optional screw fixing (60 mm spacing)