

LUXION by Case-Smart


DATASHEET
LX-WT2-201A-B


LUXION double Wi-Fi touch switch with glass panel and aluminium frame


LUXION double Wi-Fi touch switch with 4 mm safety glass and an aluminium frame, controllable via Smart Life, Alexa and Google Home.

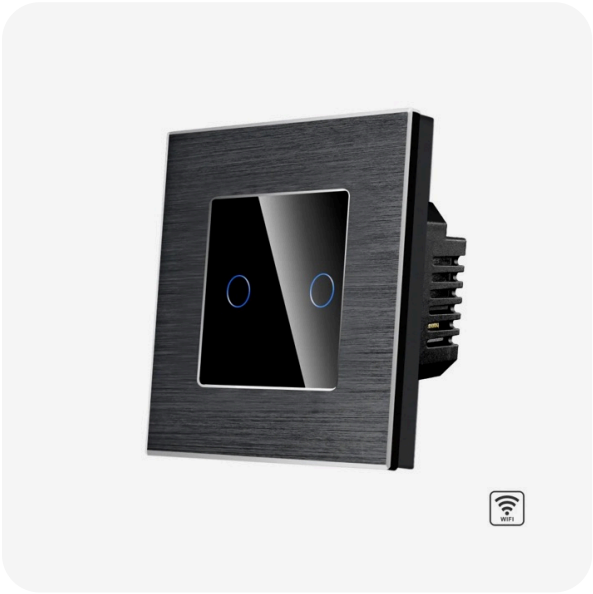


Black


Gold


Grey


White

CODES


Colour	Code
Black	LX-WT2-201A-B
Gold	LX-WT2-201A-G
Grey	LX-WT2-201A-GY
White	LX-WT2-201A-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Double touch switches
Connectivity	Wi-Fi
Product type	Double Wi-Fi touch switch with glass panel and aluminium frame
Function	Touch, app and voice control; timer, schedules, group control (sharing with family), scenes; configurable power-cut recovery state (on, off or last state)
Number of buttons	2
Operating voltage	160–240 V AC (max. 250 V AC)
Frequency	50/60 Hz
Maximum load	1500 W/button resistive load; 1000 W/button LED / inductive load
Neutral wire (N)	Not required with the Wi-Fi adapter connected in parallel to a lamp; without the adapter a neutral wire is required
Protocol	Wi-Fi 2.4 GHz 802.11 b/g/n, no hub

Compatibility	Smart Life app (iOS / Android); Amazon Alexa, Google Home, IFTTT
LED indicator	Blue with the light on, dim blue with the light off; can be disabled in the app
Front material	Safety glass, aluminium frame
Glass thickness	4 mm
Base material	Flame-retardant PVC plastic
Front dimensions (W × H)	86 × 86 mm
Depth	35 mm
Mounting	Flush-mounted, indoor dry locations only
Protection rating	IP20
Operating temperature	-20 °C ~ 70 °C
Operating humidity	≤ 95%
Colours	white, black, gold, grey

DIMENSION DRAWING

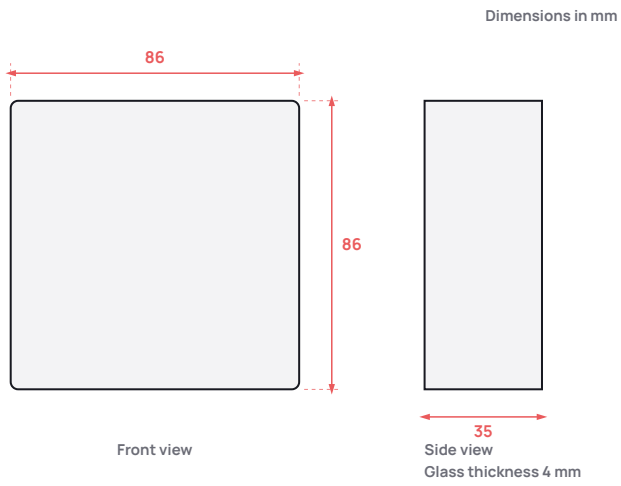

DESCRIPTION

LUXION switches stand out for their compact, elegant and minimalist design. They are versatile, and the touch sensor is extremely precise, the same as that of a smartphone. The construction is durable and the switches do not discolour over time. This is a practical product, made from quality materials and built to last, bringing functionality and comfort to your home.

The double Wi-Fi touch switch combines a 4 mm safety glass panel with an aluminium frame and connects directly to your Wi-Fi router, with no hub required. Control from your mobile phone requires the Smart Life app, and the switch is compatible with Alexa, Google Home and IFTTT.

- Timer, scheduling, group control (sharing with family) and scene creation
- Blue LED indicator when the light is on and faint blue when it is off; the indicator can be disabled in the app

without an adapter when a neutral wire is present in the flush-mounted box

Features

Enjoy the versatility of the new LUXION smart switches: a double touch switch with an aluminium frame and Wi-Fi connectivity.

- Double touch switch
- Aluminium frame
- Wi-Fi connectivity
- Extremely precise touch sensor, the same as that of a smartphone

Double Wi-Fi switch

LUXION Wi-Fi switches connect directly to your Wi-Fi router, with no hub required.

- Connection to the Wi-Fi router
- App control
- Voice control

App control

Change the atmosphere of your home with a simple tap! Open the Smart Life app and adjust the lighting just the way you want. To control the switch from your mobile phone, you need to install the Smart Life app.

- Timer and scheduling
- Group control (sharing with family)
- Scene creation
- Power-cut recovery setting: on, off or last state
- LED indicator can be disabled in the app

Compatible with Amazon Alexa

With a simple voice command you control the Wi-Fi switch to turn the lights on or off, e.g. “Alexa, turn on the light!”. Google Home is also supported.

Structure / components

The switch consists of three main parts.

- Elegant glass panel
- Switch mechanism
- Metal frame

Installation / wiring diagram

The switch can be connected with or without a neutral wire in the flush-mounted box. Caution: high voltage – disconnect the power supply before installation.

- Terminals: N, L, L1, L2, L3
- Option 1: NO neutral wire (N) required in the flush-mounted box – with the Wi-Fi adapter connected in parallel to one of the lamps
- Option 2: Neutral wire (N) required in the flush-mounted box – without the Wi-Fi adapter, the neutral wire is connected to terminal N
- For domestic use in indoor, dry locations only