LUXION key fob remote control for dimmer and two-way switches

4-button key fob remote control for LUXION RF433 dimmer and two-way switches: control of 3 lights and an all-off button.



CODES


Colour	Code
–	LX-BG-RC2014SD

SPECIFICATIONS

Brand	LUXION
Category	Smart home › Remote controls
Connectivity	RF433
Product type	RF433 key fob remote control
Function	Control of up to 3 lights (one button per light) and an all-off button; with a dimmer switch: on, increase, decrease brightness, off
Number of buttons	4 (A, B, C, D)
Operating voltage	27A / 12 V battery (not included)
Protocol	RF433
RF frequency	433.92 MHz
Range	up to 20 m
Compatibility	Only with LUXION RF dimmer switches and LUXION RF two-way switches
LED indicator	Yes (indicator light)
Base material	Plastic
Front dimensions (W × H)	40 × 25 mm
Depth	15 mm
Mounting	Key ring loop

DIMENSION DRAWING

Dimensions in mm

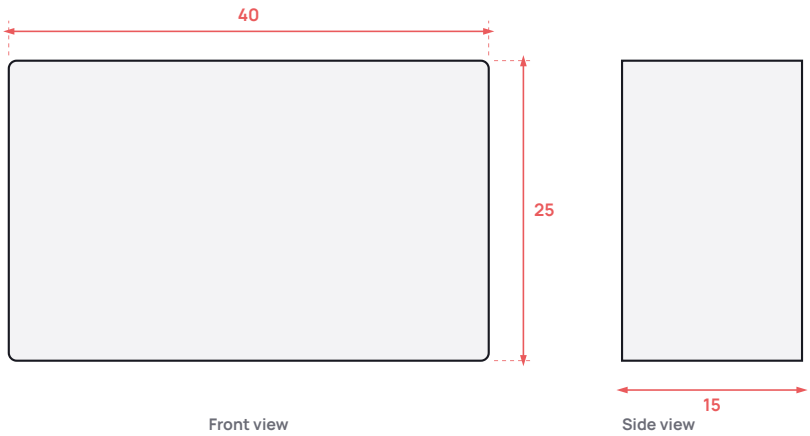

DESCRIPTION

Luxion key fob remote control, compatible with Luxion RF433 dimmer switches and two-way switches. With it you can control 3 lighting points, while one button is dedicated to the all-OFF function.

The remote control has 4 buttons: one button for each light, to control up to 3 lights, and an all-off button that switches off all 3 lights at once.

Works exclusively with Luxion RF dimmer switches and Luxion RF two-way switches.

Features

Compact key fob remote control for LUXION switches. Please note: it only works with LUXION RF dimmer switches and RF two-way switches.

- 4 buttons (A, B, C, D)
- Control of up to 3 lights and an all-off button
- Wireless RF433 operation (433.92 Mhz)
- Range up to 20 m
- LED indicator light
- Key ring loop

On/off switch operation

When used with on/off switches, each button controls a different switch.

- Button A: Switch 1
- Button B: Switch 2
- Button C: Switch 3
- Button D: Switch off all switches

Remote dimmer operation

When used with dimmer switches, the buttons adjust the light remotely.

- Button A: Lamp on
- Button B: Increase brightness
- Button C: Decrease brightness
- Button D: Lamp off

Dimensions and battery

- Length: 40 mm
- Width: 25 mm
- Thickness: 15 mm
- 27A / 12V battery (not included)
- Battery dimensions: 28 mm x 8 mm

Pairing instructions

- 1. Hold your finger on the switch for 5 seconds until you hear a beep.
- 2. Press the button (A, B, C) until you hear a beep again. The remote control has been paired successfully.

Unpairing

Hold your finger on the switch for 10 seconds until you hear 2 beeps.