LUXION mechanical doorbell push-button module

LUXION mechanical doorbell push-button module, compact and minimalist, in white, gold, grey or black, which does not discolour.




Black


Gold


Grey


White

CODES

Colour	Code	EAN
Black	LX-MP008B	0749672493320
Gold	LX-MP008G	0749672493344
Grey	LX-MP008GY	0749672493337
White	LX-MP008W	0749672493313


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Doorbell, sensors, blank covers
Product type	Mechanical doorbell push-button module, without glass frame
Function	Doorbell push-button — the bell operates only while the button is pressed
Number of buttons	1
Operating voltage	Up to 250 V AC
Rated current	10 A
Wiring	Live (L) to the module, neutral (N) via the bell
Base material	Flame-retardant PVC plastic
Front dimensions (W × H)	45 × 45 mm
Depth	34 mm (15 mm + 20 mm according to the banner)
Module dimensions	45 × 45 × 34 mm; rear section height 49 mm
Fixing screw spacing	60 mm

Compatibility	LUXION glass frames (glass and metal frames not included)
Service life	Up to 100,000 operations
Colours	white, black, gold, grey

DIMENSION DRAWING

Dimensions in mm

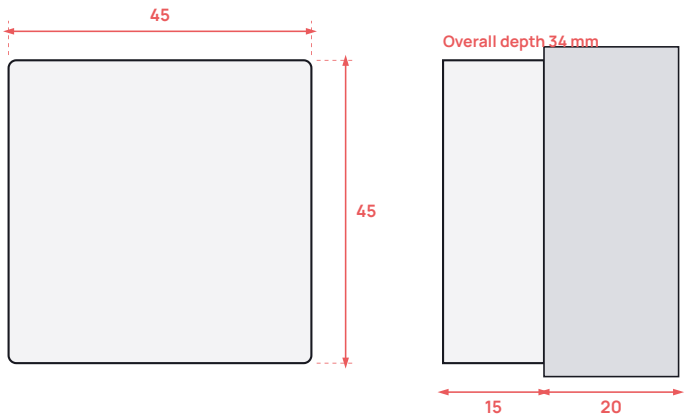

DESCRIPTION

LUXION mechanical doorbell push-button module with a compact, elegant and minimalist design. Its construction is durable and does not discolour over time. It is a practical product, made from quality, long-lasting materials.

The bell rings only while the push-button is held down.

The module is supplied without a frame; the glass or metal frame is chosen and purchased separately.

Features

Mechanical doorbell push-button module from the LUXION range, with a bell symbol on the button.

- Compact, elegant and minimalist design
- Durable construction that does not discolour over time
- Rated for up to 100,000 presses
- Available in white, gold, grey and black

Structure / components

The module is made of flame-retardant PVC plastic and is supplied without a frame.

- Glass frame: not included
- Metal frame: not included

Dimensions

The module is fixed with a screw system.

- Width: 45 mm
- Height: 45 mm
- Fixing screw spacing: 60 mm

Installation / wiring diagram

The module is connected to the doorbell circuit with live and neutral, with the bell connected between the neutral and the module, as shown in the wiring diagram.

- Live (L): connected directly to the module
- Neutral (N): connected to the module via the bell