LUXION single two-way mechanical switch mechanism

LUXION single two-way mechanical switch mechanism, 250V AC 10A, up to 100,000 operations, for LUXION glass frames only.




Black


Gold


Grey


White

CODES


Colour	Code	EAN
Black	LX-MP002B	0749672493085
Gold	LX-MP002G	0749672493108
Grey	LX-MP002GY	0749672493092
White	LX-MP002W	0749672493078

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Two-way / intermediate mechanisms
Product type	Single two-way mechanical switch mechanism, without glass frame
Function	Two-way (mechanical)
Number of buttons	1
Operating voltage	up to 250 V AC
Rated current	10 A
Compatibility	LUXION glass frames only
Base material	Fire-resistant PVC plastic
Front dimensions (W × H)	50 × 50 mm
Depth	35 mm (15 mm + 20 mm)
Mechanism dimensions	Body height 49 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted, with screws; glass frame and metal frame not included
Service life	up to 100,000 operations

DIMENSION DRAWING

Dimensions in mm

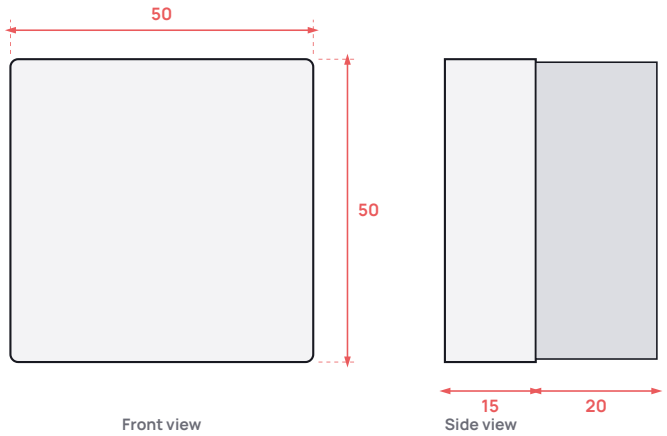

DESCRIPTION

The LUXION single two-way mechanical switch mechanism features a compact, elegant and minimalist design. Its construction is durable and the products do not discolour over time. It is a practical product, made from quality materials with a long service life.

It allows a light fitting to be controlled from more than one location, in combination with a second two-way switch or with intermediate switches.

Compatible only with LUXION glass frames

Features

LUXION single two-way mechanical switch mechanism, available in white, gold, black and grey finishes.

- Compact, elegant and minimalist design
- Durable construction that does not discolour over time
- Rated for up to 100,000 operations
- Mechanism made of fire-resistant PVC plastic
- Compatible only with LUXION glass frames

Dimensions

The mechanism is fixed with a screw system. The glass frame and metal frame are not included.

- Front: 50 mm x 50 mm
- Mechanism height (rear body): 49 mm
- Fixing screw spacing: 60 mm
- Glass frame: not included
- Metal frame: not included

Installation / wiring diagram

Three wiring diagrams with neutral (N) and live (L) for controlling a light fitting from multiple locations.

- Diagram 1: neutral (N), live (L) and two two-way switches
- Diagram 2: two-way switch, intermediate switch, two-way switch
- Diagram 3: two-way switch, two intermediate switches, two-way switch