LUXION LX-CM01 smart curtain motor, 80 W, with app control and scheduling

LUXION LX-CM01 80 W smart curtain motor, controlled from the Smart Life app, a remote control or a switch, with scheduling.



CODES


Colour	Code
–	LX-CM01

SPECIFICATIONS

Brand	LUXION
Category	Smart home › Electric curtains
Product type	Smart curtain motor
Function	Control from app (scheduling, status), remote control, switch and voice control; schedules
Operating voltage	100–240 V AC
Frequency	50/60 Hz
Power	80 W
Rated current	0.3 A
Torque	2.5 Nm
Maximum load	Curtain up to 66 kg (depending on track length)
Neutral (N)	Yes (blue wire)
Interface	485
Compatibility	Smart Life app (iOS/Android); LUXION curtain set remote control; LUXION touch and mechanical curtain switches
Dimensions	72 × 51 × 300 mm
Insulation class	E
Protection rating	IP41
Package contents	Curtain motor (remote control not

DIMENSION DRAWING

Dimensions in mm

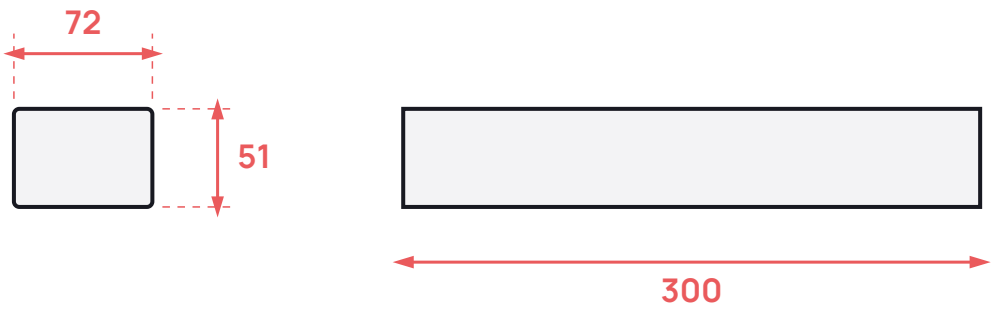

Front view

Side view

DESCRIPTION

The device lets you control your curtains directly from a remote control (not included) or via the Smart Life mobile app.

It is also compatible with Luxion curtain switches:

- touch
- mechanical

Please note! The remote control is not included in the package. It is part of the Luxion curtain set.

LUXION curtain motor

Motorised curtain drive system with many practical ways of operation.

- Remote control operation
- Control from your phone
- Voice control
- Scheduling

Remote control operation

The curtain motor can be controlled with a remote control. Please note: the remote control is not included in the package; it is part of the LUXION curtain set.

Control via app

The curtain motor can also be controlled from the Smart Life mobile app (iOS/Android), with scheduling and status display.

Scheduling

The curtain motor can be scheduled via the Smart Life mobile app.

Wiring diagram

The motor features a 485 interface port and a 5-core cable.

- 1. Grey wire – left direction
- 2. Red wire – live (220V)
- 3. Blue wire – neutral
- 4. Green/yellow wire – earth
- 5. Black wire – right direction