LUXION LX-RSR01 smart Wi-Fi relay with app control and scheduling

LUXION smart Wi-Fi relay up to 10A, with control from the Smart Life app, scheduling and voice control.



CODES


Colour	Code
–	LX-RSR01 (WIFI)

SPECIFICATIONS

Brand	LUXION
Category	Smart home › Wi-Fi relays
Connectivity	Wi-Fi
Product type	Smart Wi-Fi relay
Function	Remote control via app, scheduling, voice control
Number of channels	1
Operating voltage	100–240 V AC
Frequency	50/60 Hz
Rated current	5 A, 250 V AC (marking on the device); the description states 10 A, 240 V AC resistive load
Standby consumption	≤0.5 W
Neutral (N)	Required (L, N at input and output)
Protocol	Wi-Fi 2.4 GHz, IEEE 802.11 b/g/n
Compatibility	Smart Life app (iOS or Android); Amazon Alexa, Google Home, IFTTT
LED indicator	Yes; pairing button
Module dimensions	55 × 55 × 25 mm
Operating temperature	-20 ~ +70 °C
Extras	Protective fuse

DIMENSION DRAWING

Dimensions in mm

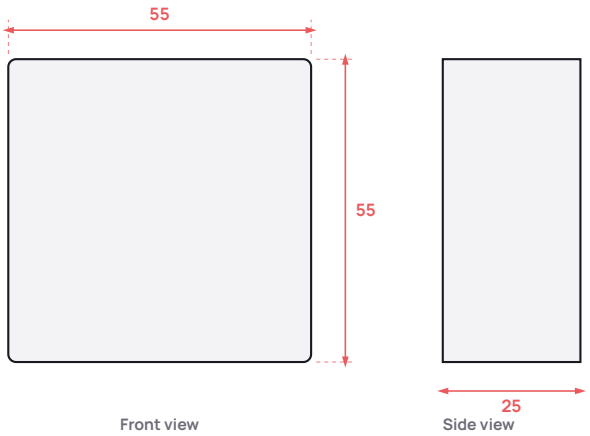

DESCRIPTION

The Luxion Wi-Fi smart relay supports a maximum current of 10A, 240V AC on a resistive load. It enables real-time monitoring of Luxion Wi-Fi devices and their remote control via the Smart Life app, available for Android and iOS.

- Control via mobile app
- 2.4GHz Wi-Fi connection
- Operating schedules
- Voice control with Amazon Alexa and Google Home
- IFTTT compatibility

Features

Smart Wi-Fi relay for remote control of loads via your mobile phone.

- Control via mobile app
- Wi-Fi connection
- Scheduling
- Voice control

App control and voice control

Compatible with Amazon Alexa, Google Home and IFTTT, with control via the Smart Life app.

- Amazon Alexa
- Smart Life (Android and iOS)
- Google Home
- IFTTT

Structure / components

- Pairing button
- LED indicator
- Protective fuse

Dimensions

- Dimensions: 55 x 55 x 25 mm
- Length: 55 mm
- Depth: 25 mm

Installation / wiring diagram

Connection with live (L) and neutral (N) at the input and at the output to the load.

- IN: N, L (power supply)
- OUT: L, N (to the lamp)