LUXION by Case-Smart

DATASHEET
LX-MP034B

LUXION Wi-Fi smart socket mechanism without glass frame

Wi-Fi smart Schuko socket mechanism, 16A, with earthing and child protection, controlled via Smart Life, Alexa and Google Home.




Black


Gold


Grey


White

CODES


Colour	Code	EAN
Black	LX-MP034B	0658606019386
Gold	LX-MP034G	0658606019393
Grey	LX-MP034GY	0658606019409
White	LX-MP034W	0658606019379

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Sockets and USB
Connectivity	Wi-Fi
Product type	Wi-Fi smart Schuko socket mechanism, without glass or metal frame
Function	Timer, scheduling, group control (sharing with the family), scenes; selectable state after a power failure (on, off or previous)
Number of sockets	1
Operating voltage	100–240 V
Frequency	50/60 Hz
Rated current	16 A
Standby consumption	≤0.2 W (wireless operation)
Neutral (N)	Yes (L, N and earth)
Protocol	Wi-Fi 2.4 GHz, IEEE 802.11 b/g/n
Compatibility	Smart Life app (iOS and Android); Amazon Alexa, Google Home, IFTTT

Base material	Flame-retardant PVC
Front dimensions (W × H)	50 × 50 mm
Depth	45 mm
Mechanism dimensions	Side height 47 mm
Fixing screw spacing	60 mm
Protection rating	IP45
Colours	black, gold, grey, white

DIMENSION DRAWING

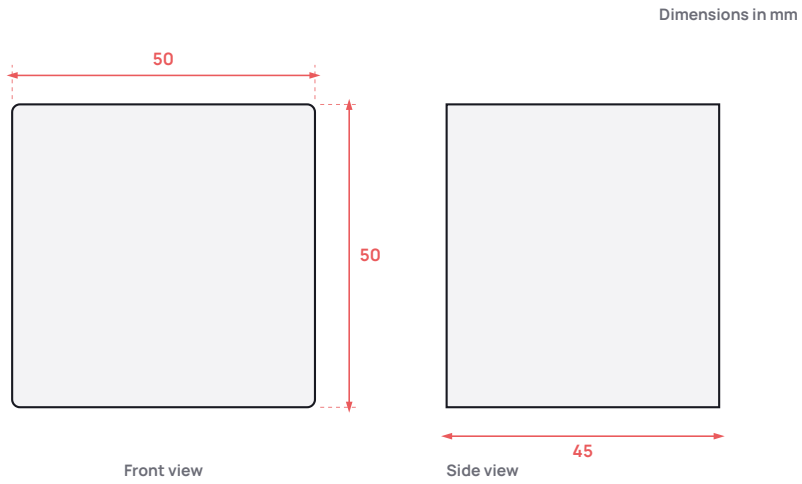

DESCRIPTION

The Luxion Wi-Fi single smart socket mechanism features standard earthing and child protection. It offers smart functions such as a timer, scheduling, group control (sharing with the family) and scene creation.

- Control via the Smart Life app for iOS and Android
- Compatible with Amazon Alexa, Google Home and IFTTT
- Selectable state after a power failure: on, off or retain the previous state
- LED indicator light

This product is a mechanism without a frame; the glass or metal frame is not included.

Features

Single smart Schuko socket mechanism with Wi-Fi connectivity, earthing and child protection.

- Wi-Fi 2.4GHz
- Rated current 16A
- Standard earthing with child protection
- Timer, scheduling, scene creation
- Group control (sharing with the family)
- LED indicator light

App control

Control from your smartphone via the Smart Life app and by voice commands.

- Smart Life app for iOS and Android
- Compatible with Amazon Alexa and Google Home
- Compatible with IFTTT
- Selectable state after a power failure: on, off or retain the previous state

- Width: 50 mm
- Height: 50 mm
- Depth: 45 mm
- Side height: 47 mm
- Fixing screw spacing: 60 mm

- Live (L)
- Neutral (N)
- Earth