LUXION by Case-Smart

DATASHEET
LX-MP65G-B

65W fast-charge USB socket, USB-A + 2 x USB-C, with LUXION glass frame

65W fast-charge socket with one USB-A port and two USB-C ports, in an elegant glass frame for homes, offices and commercial premises.




Black


Gold


Grey


White

CODES


Colour	Code
Black	LX-MP65G-B
Gold	LX-MP65G-G
Grey	LX-MP65G-GY
White	LX-MP65G-W

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Schuko sockets with glass frame
Product type	USB-A + 2 × USB-C charging socket, 65 W fast charging, with glass frame
Operating voltage	Input 100~240 V AC
Frequency	50/60 Hz
Rated current	Input 1.5 A max
USB-C output	DC 5/9/12/15 V 3 A, 20 V 3.25 A max
USB-A output	DC 5 V 3 A, 9 V 2.22 A, 12 V 1.67 A max
Combined output power	USB C1 + USB A: 45 W + 20 W max; USB C2 + USB A: 5 V 3.4 A 17 W max; USB C1 + C2: 45 W + 20 W max; USB C1 + C2 + A: 45 W + 20 W max
Front material	Glass
Front dimensions (W × H)	86 × 86 mm
Fixing screw spacing	85 mm
Protection rating	IP20

Colours	white, black, grey, gold

DIMENSION DRAWING

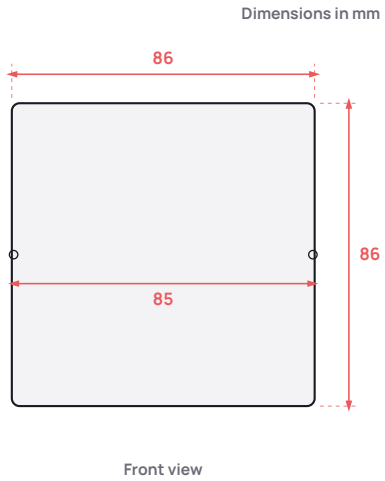

DESCRIPTION

The 65W fast-charge socket with USB-A and USB-C ports and a glass frame is the ideal solution for your home or premises. Enjoy a refined, functional design with attention to every detail.

LUXION blends harmoniously into any setting. As a result, the socket can be installed not only at home but also in spaces such as:

- offices and shops
- hospitality and catering venues (HoReCa)
- showrooms and presentation rooms
- warehouses and modern industrial premises
- residential or office buildings

Features

USB charging socket with total power of up to 65W, in a glass frame.

- 1 USB-A port and 2 USB-C ports
- Fast charging up to 65W
- Glass front, dimensions 86 x 86 mm
- For installation to the German standard (Schuko)

Technical parameters

Input 100~240V AC, 50/60Hz, 1.5A Max.

- USB-C: 5/9/12/15V 3A, 20V 3.25A Max
- USB-A: 5V 3A, 9V 2.22A, 12V 1.67A Max
- USB C1 + USB A: 45W+20W Max
- USB C2 + USB A: 5V3.4A 17W Max
- USB C1 + C2: 45W+20W Max
- USB C1 + C2 + A (all): 45W+20W Max