LUXION marble double touch switch, 500W

LUXION double touch switch with a natural marble panel, up to 500W per channel, no neutral required, metal frame included in the package.





Black



Grey



White

CODES

Colour	Code
Black	LX-ST-201M-B
Grey	LX-ST-201M-GY
White	LX-ST-201M-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Touch switches › Double touch switches
Product type	Double touch switch with natural marble panel
Function	On/off touch switch on 2 channels, no sound when touched
Number of buttons	2
Operating voltage	110–240 V AC rated (tolerance −15% ~ +10%), maximum 250 V AC
Frequency	50/60 Hz
Maximum load	3–300 W per channel for LED lamps; 500 W per channel for resistive loads
Standby consumption	0.02 W
Neutral wire (N)	Not required — fits conventional installations
LED indicator	Blue when the light is on, faint blue when it is off
Front material	Natural marble
Base material	Flame-retardant PVC plastic, metal mounting frame (included)
Front dimensions (W ×	86 × 86 mm

Depth	35 mm
Protection rating	IP20
Operating temperature	-20 ~ +70 °C
Operating humidity	≤95%
Colours	white, black, grey

DIMENSION DRAWING

Dimensions in mm

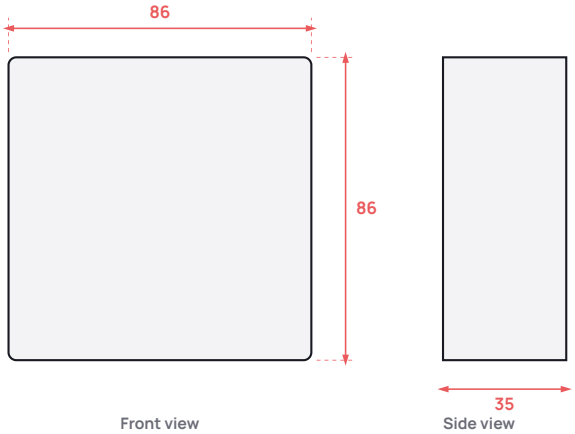

DESCRIPTION

Double marble touch switch from LUXION, compatible only with LUXION mechanisms. It stands out for its premium, elegant and minimalist design.

Made from natural marble, this model adds refinement and exclusivity to any space. It is ideal for:

- modern interiors
- luxury homes
- hotels
- premium offices

Made from quality materials, durable and practical, it offers functionality and convenience, perfectly complementing refined décor.

The metal frame is also included in the package.

Features

Double touch switch with a natural marble panel, for conventional electrical installations without a neutral wire.

- Premium natural marble panel
- Two touch channels for independent control of two lighting circuits
- LED indicator: blue when the light is on, dim blue when it is off
- No sound when touched
- No neutral wire (N) required
- Compatible only with LUXION mechanisms

Technical parameters

- Rated operating voltage: 110V ~ 240V AC (maximum 250V AC)
- Voltage tolerance: -15% ~ +10%
- Load: 3-300W max. per channel for LED lamps, 500W per channel for resistive load
- Operating frequency: 50/60Hz
- Power consumption: 0.02W
- Operating temperature: -20°C ~ +70°C
- Protection rating: IP20

mechanism and the metal frame included in the package.

- Natural marble panel
- Base made of non-flammable PVC plastic
- Metal frame (included)

Dimensions

- 86 x 86 x 35 mm

(L) connects to the L terminal of the switch. Each light fitting connects to its own output (L1 and L2), while the other side of the light fitting connects to the neutral (N).

- L: live input
- L1: output to light fitting 1
- L2: output to light fitting 2
- N: neutral, connected to the light fittings
- Caution: disconnect the power supply during installation and removal