LUXION mechanical double two-way switch mechanism

LUXION mechanical double two-way switch mechanism, compact and durable, compatible only with LUXION glass frames.




Black


Gold


Grey


White

CODES


Colour	Code	EAN
Black	LX-MP005B	0749672493207
Gold	LX-MP005G	0749672493221
Grey	LX-MP005GY	1146280053257
White	LX-MP005W	0749672493191

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Two-way / intermediate mechanisms
Product type	Mechanical double two-way switch mechanism, without glass frame
Function	Two-way, mechanical
Number of rockers	2
Operating voltage	Up to 250 V AC
Rated current	10 A
Base material	Flame-retardant PVC plastic
Front dimensions (W × H)	50 × 50 mm
Depth	34 mm (15 mm + 20 mm according to the banner)
Mechanism dimensions	50 × 50 × 34 mm; rear part height 49 mm
Fixing screw spacing	60 mm
Compatibility	Only with LUXION glass frames; works with LUXION mechanical double two-way switches
Service life	Up to 100,000 operations

DIMENSION DRAWING

Dimensions in mm

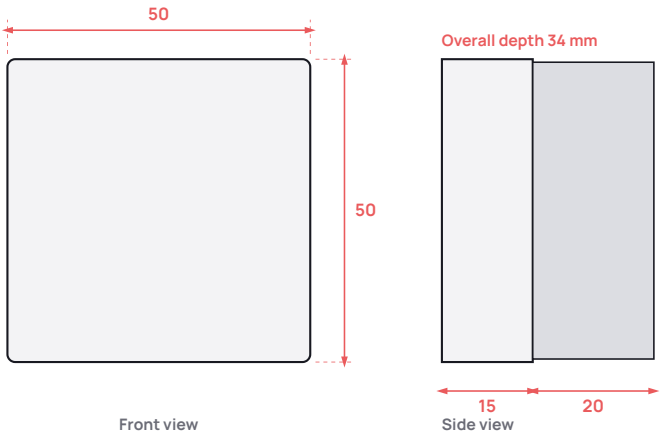

DESCRIPTION

The LUXION mechanical double two-way switch mechanism has a compact, elegant and minimalist design. Its construction is durable and does not discolour over time. It is a practical product, made from high-quality, long-lasting materials.

With two independent rockers, it allows two light fittings to be controlled from two different points, for example at the top and bottom of a staircase. It works in combination with LUXION mechanical double two-way switches.

Compatible only with LUXION glass frames.

Features

Mechanical double two-way switch mechanism from the LUXION range, for controlling two light fittings from two different points, such as the top and bottom of a staircase.

- Two independent rockers
- Compact, elegant and minimalist design
- Durable construction that does not discolour
- Up to 100,000 operations

Structure / components

The mechanism is supplied without a frame and is fitted into a LUXION glass frame.

- Mechanism made of flame-retardant PVC plastic
- Glass frame: not included
- Metal frame: not included

Dimensions

The mechanism is fixed with screws.

- Width: 50 mm
- Height: 50 mm
- Mechanism height (rear part): 49 mm
- Fixing screw spacing: 60 mm

Installation / wiring diagram

The wiring diagram shows two mechanisms connected in a two-way configuration. The live (L) and neutral (N) are connected as shown in the diagram, with the two light fittings supplied from the second mechanism.

- Neutral (N)
- Live (L)
- Two-way connection between two mechanisms