
LUXION touch curtain switch mechanism

LUXION touch curtain switch mechanism with a precise touch sensor, compatible only with LUXION glass frames and panels.

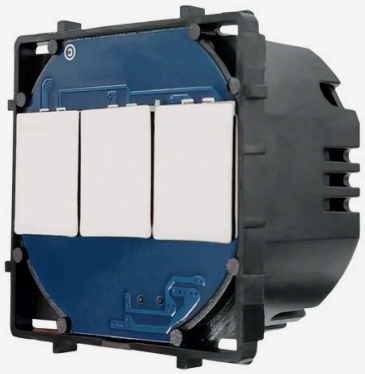

CODES


Colour	Code	EAN
–	LX-MT-C201	0749672494563

SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Build your own › Mechanisms › Doorbell, sensors, blank covers
Product type	LUXION touch curtain switch mechanism
Function	Touch (capacitive sensor), curtain motor control
Operating voltage	110–240 V AC
Frequency	50/60 Hz
Maximum load	800 W per channel
Standby consumption	≤0.2 W
Neutral wire (N)	Required
Terminals	L, L1, L2, N
Compatibility	Only with LUXION glass frames and panels
Mechanism dimensions	50 × 50 mm, side height 49 mm
Depth	5 mm + 26 mm
Fixing screw spacing	60 mm
Mounting	Flush-mounted; glass panel and metal frame not included
Operating temperature	-20 ~ +70 °C
Operating humidity	≤95%
Service life	Up to 100.000 operations

DIMENSION DRAWING

Dimensions in mm

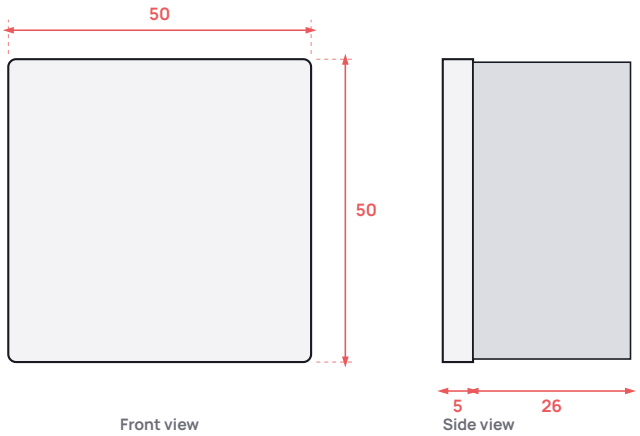

DESCRIPTION

The LUXION switch range stands out for its compact, elegant and minimalist design. The switches are versatile and the touch sensor is extremely precise, just like that of a smartphone. The construction is durable and the switches do not discolour over time.

This is a practical product, made from quality materials and built to last, offering functionality and comfort in your home. The touch mechanism controls curtain motors.

Compatible only with LUXION glass frames and panels.

Features

Touch (capacitive) curtain switch mechanism from the LUXION range, for controlling curtain motors. The glass panel and metal frame are not included.

- Precise touch sensor, like that of a smartphone
- Durable construction that does not discolour over time
- Service life of up to 100,000 operations
- Compatible only with LUXION glass frames and panels

Technical parameters

- Operating voltage: 110V-240V AC
- Operating frequency: 50/60Hz
- Load: 800W/channel
- Power consumption: ≤0.2W
- Operating temperature: -20°C ~ 70°C
- Operating humidity: ≤95%

Structure / components

The mechanism fits behind a LUXION glass panel and metal frame, which are sold separately.

- Glass panel (not included)
- Metal frame (not included)

Dimensions

- Width: 50 mm
- Height: 50 mm
- Depth: 5 mm + 26 mm
- Side height: 49 mm
- Fixing screw spacing: 60 mm

Installation / wiring diagram

Connect the mechanism according to the wiring diagram. Switch off the power supply before installation and removal.

- Neutral (N): to terminal N and to the motor
- Live (L): to terminal L
- L1 and L2: to the two motor wires
- Screw fixing, 60 mm spacing