
LUXION
by Case-Smart


DATASHEET
LX-ST-301/MP010-B

LUXION triple touch switch with Schuko socket and glass frame


LUXION triple touch switch with Schuko socket in a glass frame, with an elegant, minimalist design that does not fade over time.




Black


Gold


Grey


White

CODES

Colour	Code
Black	LX-ST-301/MP010-B
Gold	LX-ST-301/MP010-G
Grey	LX-ST-301/MP010-GY
White	LX-ST-301/MP010-W


SPECIFICATIONS

Brand	LUXION
Standard	German (Schuko)
Category	Sockets › Switch and socket
Product type	Triple touch switch + Schuko socket with glass frame
Function	Touch switch for 3 lighting circuits + Schuko socket
Number of buttons	3
Number of sockets	1 (earthed Schuko)
Operating voltage	110–250 V
Frequency	50/60 Hz
Rated current	16 A socket / 10 A switch
Terminals	L, L1, L2, L3, N, earth
Front material	Glass panel
Base material	Metal frame
Front dimensions (W × H)	157 × 86 mm
Depth	35 mm overall (panel 9 mm + mechanism 26 mm)

Fixing screw spacing	60 mm; centre-to-centre distance 130 mm
Mounting	Flush-mounted
Protection rating	IP44
Operating temperature	-20 ~ +70 °C
Operating humidity	10% ~ 93%
Service life	Up to 100,000 operations
Colours	white, black, grey, gold

DIMENSION DRAWING

Dimensions in mm

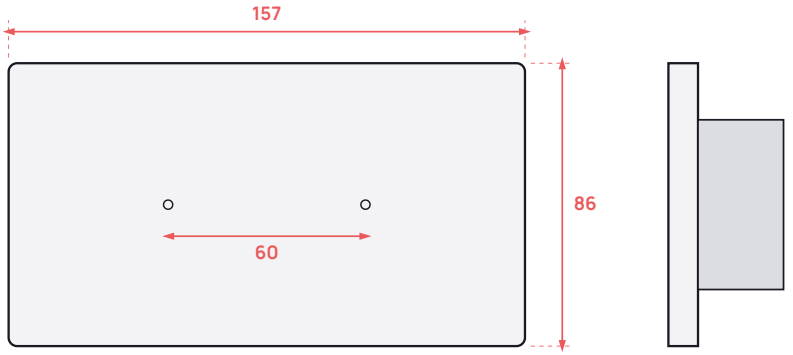

Front view

Side view

DESCRIPTION

The LUXION triple touch switch with socket and glass frame stands out for its compact, elegant and minimalist design. It combines a triple lighting switch and a Schuko socket in a single glass frame.

Its construction is durable and the products do not discolour over time. It is a practical product, made from high-quality, durable materials, offering functionality and comfort in your home.

- Extremely precise touch sensor, just like the sensor of a smartphone
- Safety glass front that retains its elegant appearance
- Available in white, black, grey and gold

Compact, elegant and minimalist design

Triple lighting switch and socket in a single glass frame. Enjoy the flexibility of the new Luxion switches.

Touch sensor

The touch sensor is extremely precise, just like the sensor of a smartphone.

Does not fade

The elegant design remains unchanged over time.

Structure / components

- Glass panel
- Switch + socket mechanism
- Metal mounting frame

- Length: 157 mm
- Height: 86 mm
- Panel thickness: 9 mm
- Mechanism depth: 26 mm
- Mechanism width: 49 mm
- Centre-to-centre distance: 130 mm
- Fixing screw spacing: 60 mm

socket. Connect the live (L) to the switch's L terminal and the three lighting circuits to terminals L1, L2 and L3.

- Neutral (N)
- Earth
- Live (L)
- Switch terminals: L3, L2, L1, L

Installation steps

- 1. Open the packaging.
- 2. Connect the wires and tighten the screws.
- 3. Fix the frame with the screws.
- 4. Fit the front panel.